



Datasheet

Radar level transmitter

TUP-TD


Medium for:
Liquids, Solids

Measuring principle

When the product surface reflects the pulse, the meter receives the reflection. Then the device calculates how long it took the pulse to return and translates that time delay into a level measurement.

The level of the liquid (or solid) is measured by radar signals transmitted from the antenna at the tank top. After the radar signal is reflected by the liquid surface the echo is picked up by the antenna. As the signal is varying in frequency the echo has a slightly different.

- A Range set
- B Low adjustment
- C High
- D Blind area

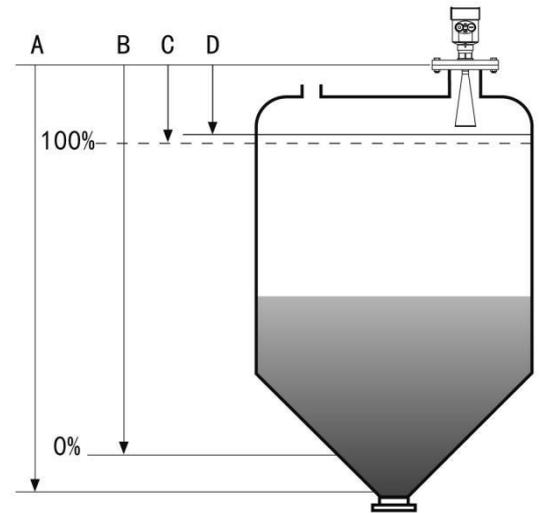

Datum measurement: Screw thread bottom or the sealing surface of the flange.

Note: Make sure the radar level meter the highest level cannot enter the measuring blind area (Figure D shown below).

Advantages

Non-contact radar technology is characterized by extremely high accuracy. The measurement is influenced neither by fluctuating product features nor by changing process conditions such as temperature, pressure or strong dust generation. The user-friendly adjustment without vessel filling and emptying saves time.

The characteristics of 26G radar level meter

- (1) Small antenna size, easy to install; Non-contact radar, no wear, no pollution.
- (2) Almost no corrosion, bubble effect; almost not affected by water vapor in the atmosphere, the

temperature and pressure changes.

- (3) Serious dust environment on the high level meter work has little effect.
- (4) A shorter wavelength, the reflection of solid surface inclination is better.
- (5) Beam angle is small, the energy is concentrated, can enhance the ability of echo and to avoid interference.
- (6) The measuring range is smaller, for a measurement will yield good results.
- (7) High signal-to-noise ratio, the level fluctuation state can obtain better performance.
- (8) High frequency, measurement of solid and low dielectric constant of the best choice.

Type overview

TD901	TD902	TD902T
		
Application: Corrosive liquid	Application: Slightly corrosive liquid	Application: Temperature resistant, pressure resistant, slightly corrosive liquid
Measuring Range: 10 meters	Measuring Range: 30 meters	Measuring Range: 20 meters
Process Connection: Thread, Flange	Process Connection: Thread, Flange	Process Connection: Thread, Flange
Process Temperature: -40°C~130°C	Process Temperature: -40°C~250°C	Process Temperature: -40°C~130°C(Standard type) -40°C~250°C(High temp. type)
Process Pressure: -0.1 ~ 0.3 MPa	Process Pressure: -0.1 ~ 4.0 MPa	Process Pressure: -0.1 ~ 2.0 MPa
Accuracy: ± 5mm	Accuracy: ± 3mm	Accuracy: ± 3mm
Protection Grade:IP67	Protection Grade:IP67	Protection Grade:IP67
Frequency Range: 26GHz	Frequency Range: 26GHz	Frequency Range: 26GHz
Supply: 2-wire (DC24V) 4-wire (DC24V /AC220V)	Supply: 2-wire (DC24V) 4-wire (DC24V /AC220V)	Supply: 2-wire (DC24V) 4-wire (DC24V /AC220V)
Signal Output: 4-20mA /HART (2-wire / 4-wire) RS485/ Modbus	Signal Output: 4-20mA /HART (2-wire / 4-wire) RS485/ Modbus	Signal Output: 4-20mA/RS485/ Modbus
	Outer covering: Aluminum / plastic / stainless steel	





Type overview


TD903	TD904	TD905
		
Application: Solid material, Strong dust, easy to crystallize, condensation occasion	Application: Temperature resistant, pressure resistant, slightly corrosive liquid	Application: Solid particles, Powder
Measuring Range: 70 meters	Measuring Range: 80 meters	Measuring Range: 30 meters
Process Connection :Universal flange	Process Connection: Thread, Flange	Process Connection: Thread, Flange
Process Temperature: -40℃~250℃	Process Temperature: -40℃~250℃	Process Temperature: -40℃~250℃
Process Pressure: -0.1 ~ 0.3 MPa	Process Pressure: -0.1 ~ 0.3 MPa	Process Pressure: -0.1~4.0 MPa(Flat flange) -0.1 ~ 0.3 MPa(Universal flange)
Accuracy: ± 15mm	Accuracy: ± 15mm	Accuracy: ± 10mm
Protection Grade: IP67	Protection Grade: IP67	Protection Grade: IP67
Frequency Range: 26GHz	Frequency Range: 26GHz	Frequency Range: 26GHz
Supply: 2-wire (DC24V) 4-wire (DC24V /AC220V)	Supply: 2-wire (DC24V) 4-wire (DC24V /AC220V)	Supply: 2-wire (DC24V) 4-wire (DC24V /AC220V)
Signal Output: 4-20mA / RS485/ Modbus	Signal Output: 4-20mA /RS485/ Modbus	Signal Output: 4-20mA /RS485/ Modbus

Type overview


TD906	TD908	TD909
		
Application: Hygienic liquid storage, Corrosive container	Application: Rivers, lakes, shoal	Application: Rivers, lakes, shoal
Measuring Range: 20 meters	Measuring Range: 30 meters	Measuring Range: 70 meters
Process Connection: Flange	Process Connection: Thread G1½ A"/Frame /Flange	Process Connection: Thread G1½ A"/Frame /Flange
Process Temperature: -40°C~150°C	Process Temperature: -20°C~100°C	Process Temperature: -20°C~100°C
Process Pressure: Normal pressure	Process Pressure: Normal pressure	Process Pressure: Normal pressure
Accuracy: ± 3mm	Accuracy: ± 3mm	Precision: ±10mm
Protection Grade: IP67	Protection Grade: IP67/ IP65	Protection Grade: IP67/ IP65
Frequency Range: 26GHz	Frequency Range: 26GHz	Frequency Range: 26GHz
Supply: 2 wire (DC24V) 4-wire (DC24V /AC220V)	Power Supply: 4-wire (6 - 24VDC) 2-wire (24V DC)	Supply: 4-wire (6 - 24VDC) 2-wire (24V DC)
Signal output: 4-20mA /RS485/ Modbus	Signal output: 4-20mA /RS485/ Modbus	Signal output: 4-20mA /RS485/ Modbus

Dimension

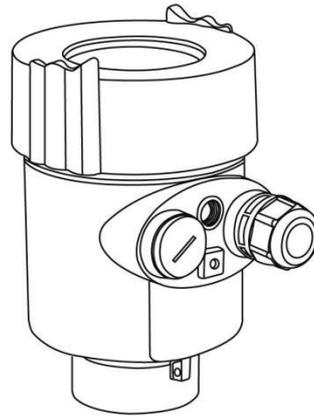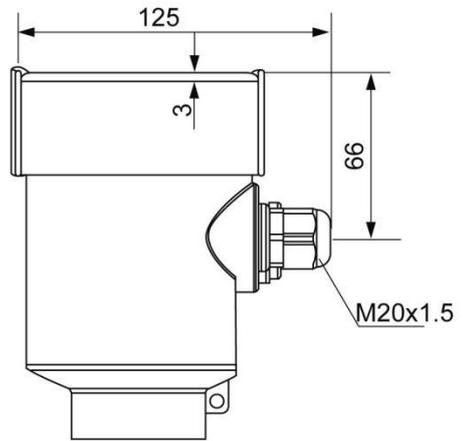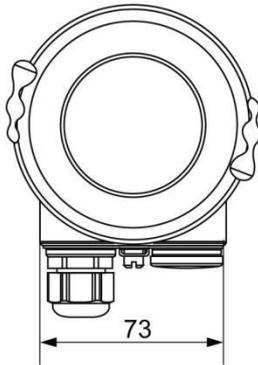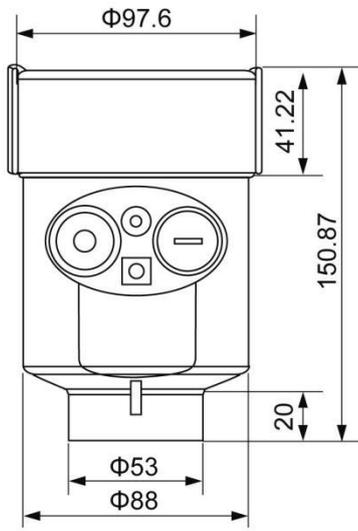


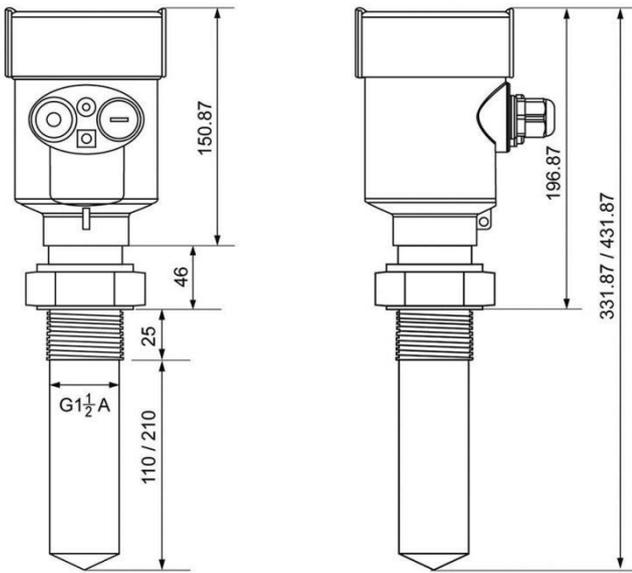


TD901

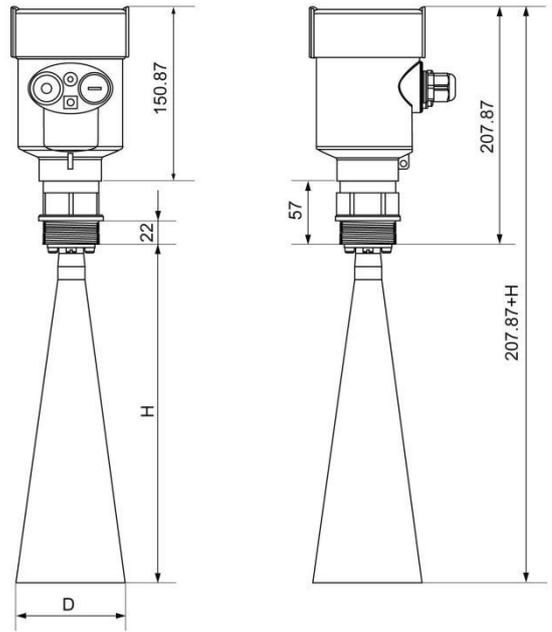


TD902

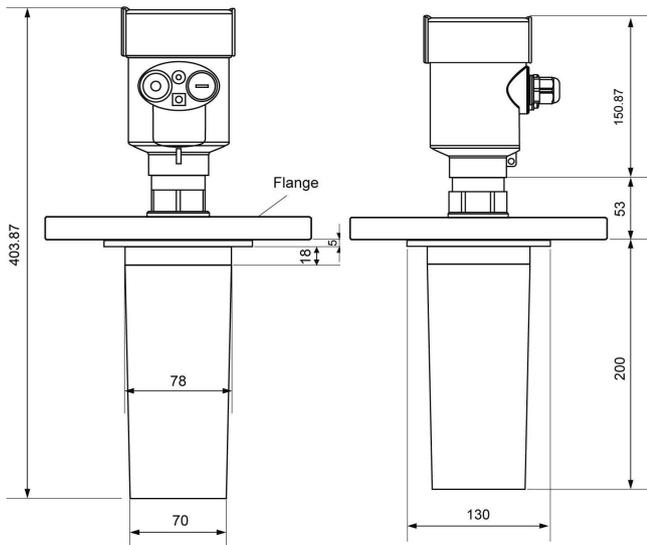


TD902T

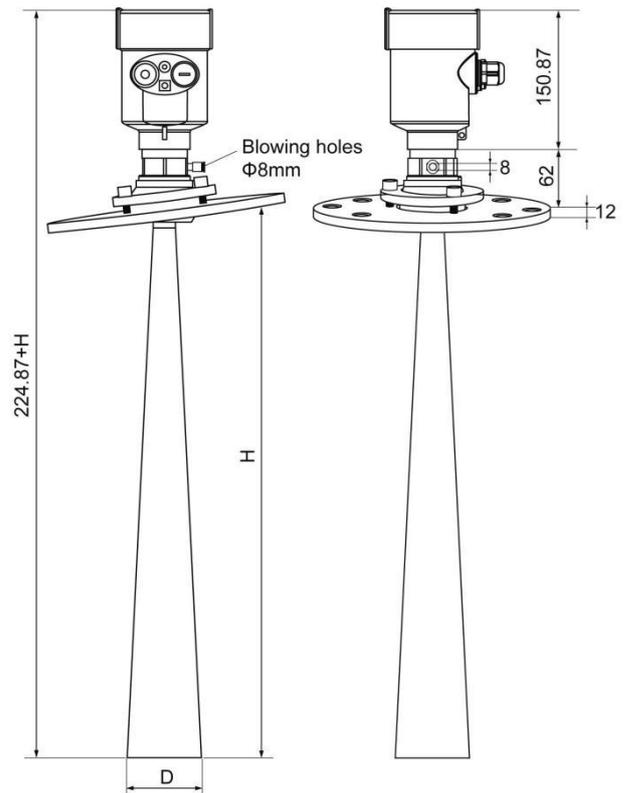

TD903

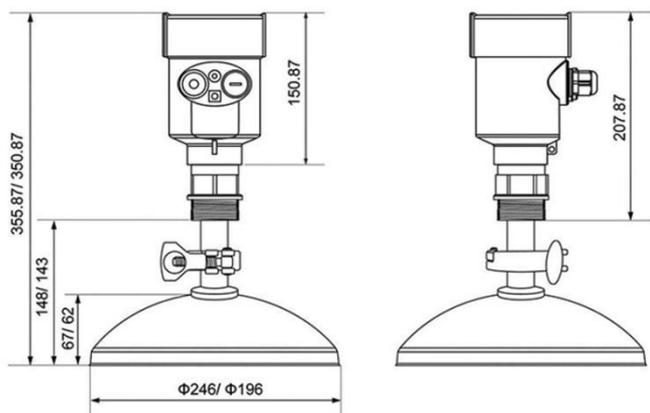


TD904

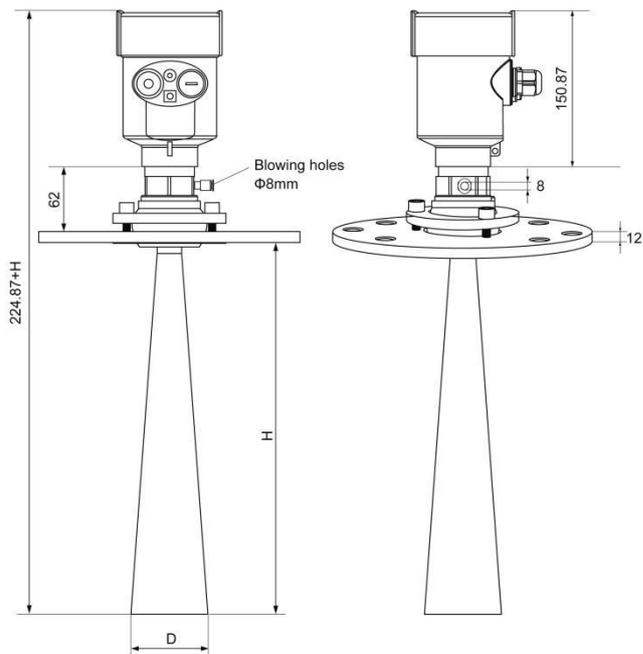


TD905


Standard type

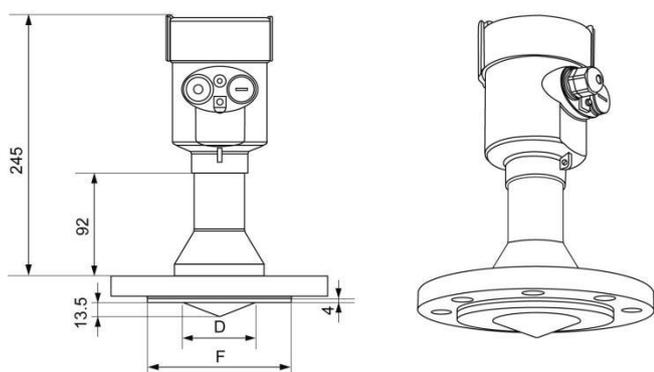


TD906

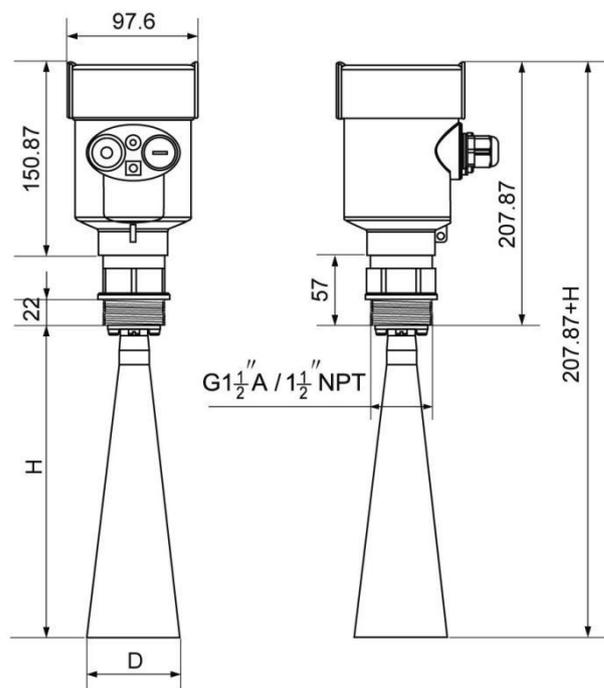

TD908

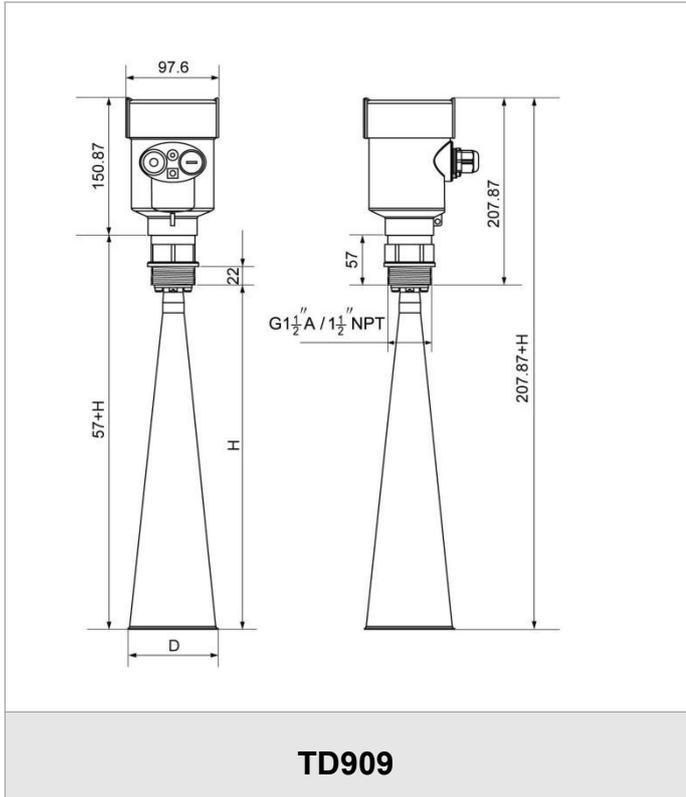

Dimension

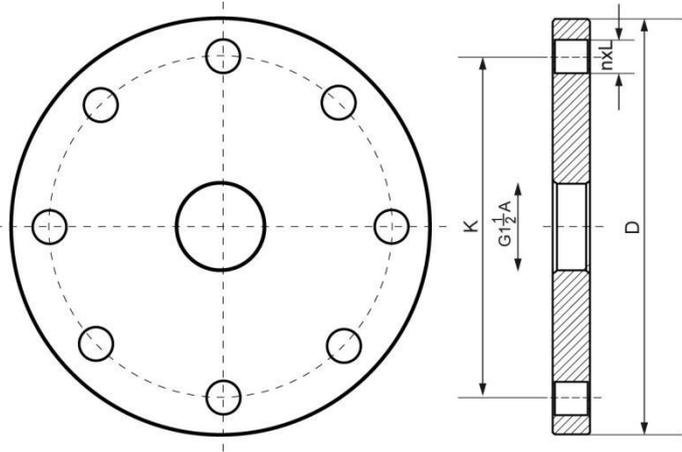

Flange Selection Tables				
Specification	Outer diameter D	Hole center distance K	Number of Holes n	Hole diameter L
DN50	Φ165	Φ125	4	18
DN80	Φ200	Φ160	8	18
DN100	Φ220	Φ180	8	18
DN125	Φ250	Φ210	8	18
DN150	Φ285	Φ240	8	22
DN200	Φ340	Φ295	12	22
DN250	Φ405	Φ355	12	26

Electrical Connection

The power supply voltage

➤ (4~20)mA/HART (Two wire system)

The power supply and the output current signal sharing a two core shield cable. The supply voltage range see technical data. For intrinsically safe type must be a safety barrier between the power supply and the instrument.

➤ (4~20)mA/HART(Four wire system)


Separate power supply and the current signal, respectively using a two-core shielded cable. The supply voltage range see technical data.

➤ RS485 / Modbus

Power supply and Modbus signal line separated respectively using a two-core shielded cable, the power supply voltage range see technical data.

Connection mode

▶ 24V two wire wiring diagram as follows:

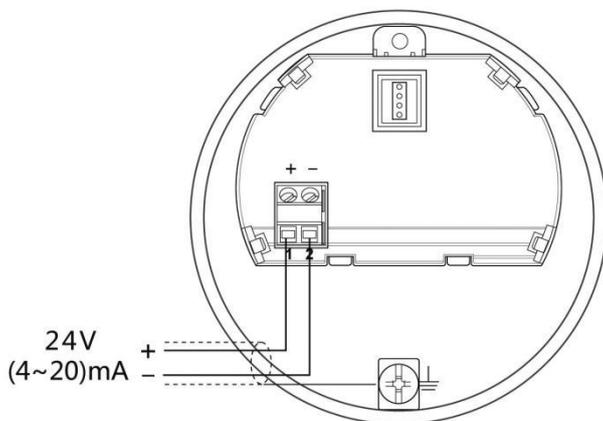

▶ 6~24V RS485/Modbus wiring diagram as follows:

