

TOUCH-SAFE HEATER 50 TO 150 W

TRODEKS®

NEW

CS060 Series
Starts at
\$48



- Low Surface Temperature
- Quick Mounting Due to DIN Rail Mountable
- Double Insulated (Plastic)
- Wide Voltage Range
- Small Size

Touch-safe heater for the use in enclosures with electrical/electronic components. The design of the heater supports the natural convection which results in a high air-current of warm air. The surface temperatures on the accessible side surfaces of the housing are kept down as a result of the heater design. Our complete range of thermostats and hygrostats can directly be connected to the heater CS060. This heater is also available in a version with plug-in thermostat requiring no additional wiring (CSF060). Both versions are designed for permanent operation.



CS0600, \$48, shown larger than actual size.

SPECIFICATIONS

Operating Voltage: 120 to 240 Vac/Vdc* (min 110V, max 265V)

Heating Capacity: See table

Heating Element: PTC resistor: temperature limiting

Surface Temperature: <80°C (176°F), except upper protective grille

Connection: 4-pole terminal 2.5 mm² (1.0 in²), torque 0.8 Nm max

Casing: Plastic according to UL94 V-0, black

Mounting: DIN clip for 35 mm (1.4") DIN rail, EN 50022

Fitting Position: Vertical
Temperature

Operating: -20 to 70°C (-4 to 158°F)
Storage: -45 to 70°C (-49 to 158°F)

Protection Type/Protection Class: NEMA 2 (IP20)/II (double insulated)
Approvals: VDE

*Note: Other voltages on request
* Operating with voltages below 140 Vac/Vdc reduces heating performance by approximately 10%.*

Model No.	CS0600	CS0601	CS0602
Heating Capacity¹	50 W	100 W	150 W
Inrush Current Max	2.5 A	4.5 A	8 A
Air Outlet Temperature²	86°C (186.8°F)	120°C (248°F)	145°C (293°F)
Dimensions	110 x 60 x 90 mm (4.3 x 2.4 x 3.5")	110 x 60 x 90 mm (4.3 x 2.4 x 3.5")	150 x 60 x 90 mm (5.9 x 2.4 x 3.5")
Weight (Approx)	0.30 kg (10.6 oz)	0.30 kg (10.6 oz)	0.50 kg (17.6 oz)



¹ Ambient temperature: See heating capacity/ambient temperature diagram

² Measured 50 mm (2") above protective grille




Heater CS 060


Heater CS 060

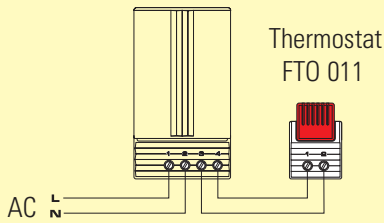



Dimensions:
mm (in)

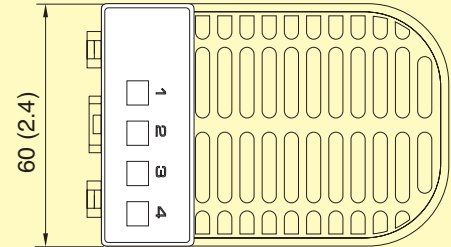


Heater CS 060

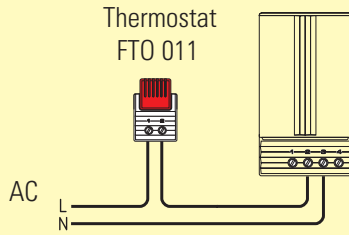

Example of connection

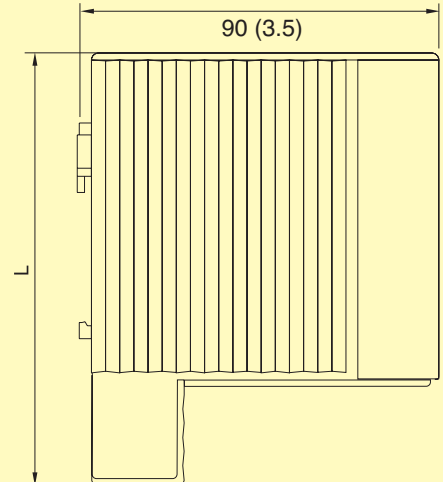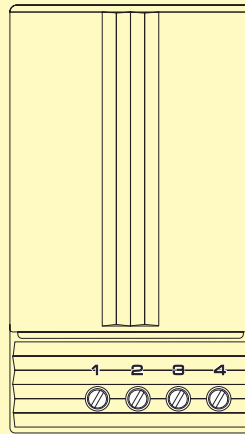

Heating Capacity/Ambient Temperature

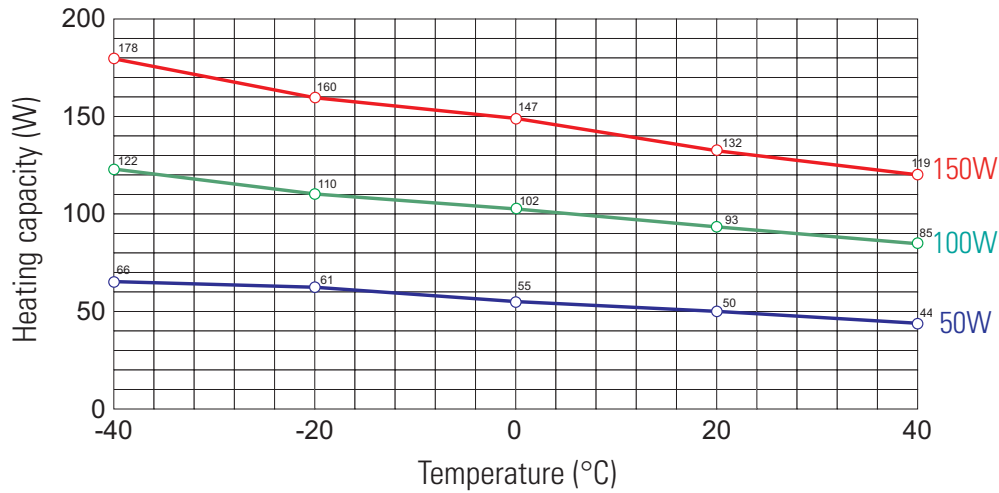

To Order (Specify Model Number)

AVAILABLE FOR FAST DELIVERY!

MODEL NO.	PRICE	DESCRIPTION
CS0600	\$48	Enclosure heater, 50 W, 120 to 240 Vac/Vdc
CS0601	69	Enclosure heater, 100 W, 120 to 240 Vac/Vdc
CS0602	79	Enclosure heater, 150 W, 120 to 240 Vac/Vdc

Comes complete with operator's manual.
Ordering Example: CS0600, enclosure heater, \$48.