

DIN STYLE CONNECTORS FOR TRANSDUCERS



CX5301, shown actual size.



CX5300, shown actual size.







CX5302, shown actual size.

CX5300 Series



- ✓ Use Where Service and Rapid Installation are Necessary
- ✓ Made According to DIN 43650/ISO 4400 Standards
- ✓ Strain-Relief Gland or Conduit-Fitting Design

The CX5300 Series connectors are made according to DIN 43650/ISO 4400 standards. They are used as protective electrical enclosures for electrical connections, primarily on pressure transducers and solenoid valves.

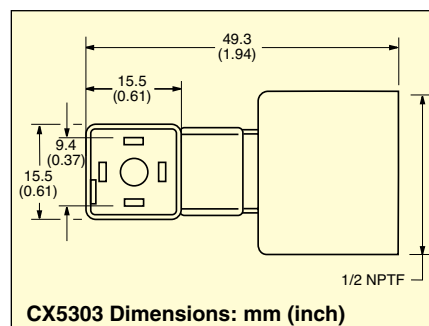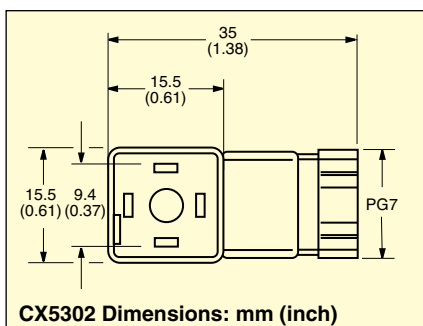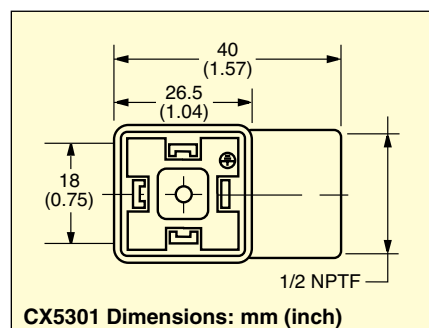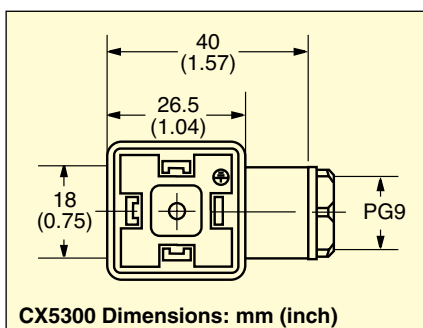

To Order

| MODEL NO. | SIZE/DESCRIPTION |
|---------------|---|
| CX5300 | DIN 43650 A connector, 4 contacts (one is a GND) on 18 mm spacing with a PG9 gland |
| CX5301 | DIN 43650 A connector, 4 contacts (one is a GND) on 18 mm spacing with a 1/2" conduit fitting |
| CX5302 | Micro mini DIN connector, 4 contacts on 9.4 mm spacing with a PG7 gland |
| CX5303 | Micro mini DIN connector, 4 contacts on 9.4 mm spacing with a 1/2" conduit fitting |

Ordering Example: CX5300, DIN style connector with 4 contacts plus ground terminal and PG9 cable gland.