

SIDE MOUNT FLUOROPOLYMER COVERED HEATERS

GTF6 and GTF9 Series Starts at

\$975



- GTF6—6 Elements**
- ✓ 6 Fluoropolymer Covered Stainless Steel Elements
 - ✓ 10 W/in²
 - ✓ 2 to 12 kW
 - ✓ 240 and 480V, 3 Phase
 - ✓ Moisture Resistant Terminal Enclosure

- GTF9—9 Elements**
- ✓ 9 Fluoropolymer Covered Stainless Steel Elements
 - ✓ 10 W/in²
 - ✓ 3 to 18 kW
 - ✓ 240 and 480V, 3 Phase
 - ✓ Moisture Resistant Terminal Enclosure




FEATURES

- ✓ Moisture Resistant Terminal Enclosure
- ✓ Side Mounted Construction with Mounting Flange
- ✓ Overtemperature Protection One Time Use Thermal Fuse (260°F), Field Replaceable
- ✓ Polypropylene Guard, Order Separately
- ✓ Custom Vertical Heights and Other Configurations Available
- ✓ Alternate Voltages and Single Phase Available

GTF6-22, \$975 shown smaller than actual size.



GTF9-32, \$1350, shown smaller than actual size.

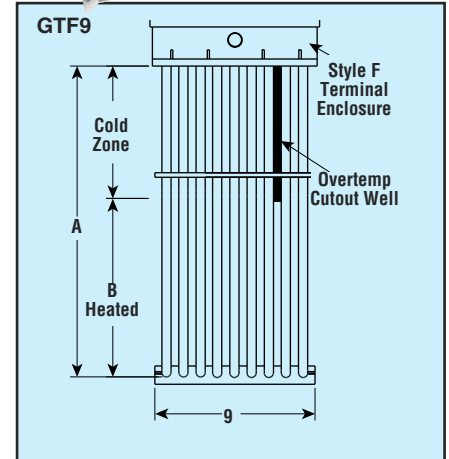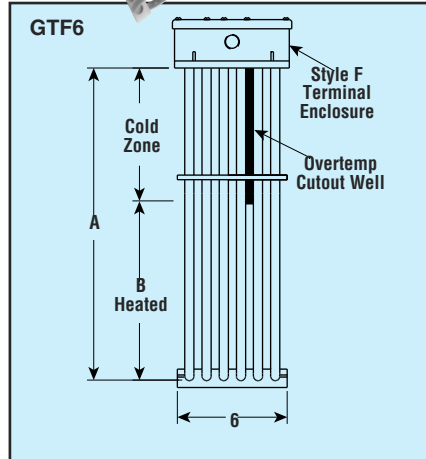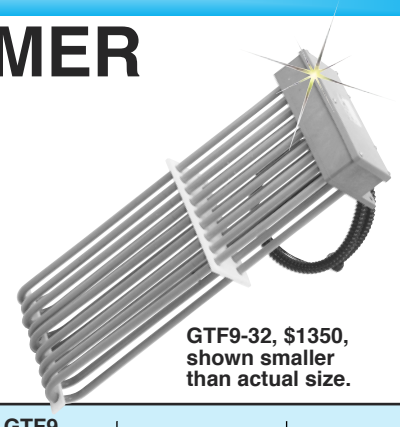

MOST POPULAR MODELS HIGHLIGHTED!

To Order (Specify Model Number)

| kW | Volts | W/in ² | Phase | DIM (in) | | Fluoropolymer Model No. | Price | Wt. (lb) | Guard ¹ Model No. | Guard ¹ Price |
|--------------------------|-------|-------------------|-------|----------|----|-------------------------|--------|----------|------------------------------|--------------------------|
| | | | | A | B | | | | | |
| GTF6 — 6 Elements | | | | | | | | | | |
| 2 | 240 | 10 | 3 | 17 | 9 | GTF6-22 | \$975 | 19 | GTF6-2G | \$190 |
| 2 | 480 | 10 | 3 | 17 | 9 | GTF6-24 | 975 | 19 | | |
| 3 | 240 | 10 | 3 | 23 | 15 | GTF6-32 | 1100 | 22 | GTF6-3G | 215 |
| 3 | 480 | 10 | 3 | 23 | 15 | GTF6-34 | 1100 | 22 | | |
| 4 | 240 | 10 | 3 | 29 | 21 | GTF6-42 | 1250 | 24 | GTF6-4G | 235 |
| 4 | 480 | 10 | 3 | 29 | 21 | GTF6-44 | 1250 | 24 | | |
| 6 | 240 | 10 | 3 | 35 | 27 | GTF6-62 | 1500 | 27 | GTF6-6G | 260 |
| 6 | 480 | 10 | 3 | 35 | 27 | GTF6-64 | 1500 | 27 | | |
| 8 | 240 | 10 | 3 | 47 | 38 | GTF6-82 | 1750 | 33 | GTF6-8G | 300 |
| 8 | 480 | 10 | 3 | 47 | 38 | GTF6-84 | 1750 | 33 | | |
| 10 | 240 | 10 | 3 | 59 | 47 | GTF6-102 | 2150 | 40 | GTF6-10G | 395 |
| 10 | 480 | 10 | 3 | 59 | 47 | GTF6-104 | 2150 | 40 | | |
| 12 | 240 | 10 | 3 | 68 | 55 | GTF6-122 | 2300 | 45 | GTF6-12G | 445 |
| 12 | 480 | 10 | 3 | 68 | 55 | GTF6-124 | 2300 | 45 | | |
| GTF9 — 9 Elements | | | | | | | | | | |
| 3 | 240 | 10 | 3 | 17 | 9 | GTF9-32 | \$1350 | 28 | GTF9-3G | \$225 |
| 3 | 480 | 10 | 3 | 17 | 9 | GTF9-34 | 1350 | 28 | | |
| 4.5 | 240 | 10 | 3 | 23 | 15 | GTF9-452 | 1500 | 33 | GTF9-45G | 255 |
| 4.5 | 480 | 10 | 3 | 23 | 15 | GTF9-454 | 1500 | 33 | | |
| 6 | 240 | 10 | 3 | 29 | 21 | GTF9-62 | 1700 | 36 | GTF9-6G | 270 |
| 6 | 480 | 10 | 3 | 29 | 21 | GTF9-64 | 1700 | 36 | | |
| 9 | 240 | 10 | 3 | 35 | 27 | GTF9-92 | 2050 | 40 | GTF9-9G | 305 |
| 9 | 480 | 10 | 3 | 35 | 27 | GTF9-94 | 2050 | 40 | | |
| 12 | 240 | 10 | 3 | 47 | 38 | GTF9-122 | 2400 | 49 | GTF9-12G | 355 |
| 12 | 480 | 10 | 3 | 47 | 38 | GTF9-124 | 2400 | 49 | | |
| 15 | 240 | 10 | 3 | 59 | 47 | GTF9-152 | 2900 | 60 | GTF9-15G | 460 |
| 15 | 480 | 10 | 3 | 59 | 47 | GTF9-154 | 2900 | 60 | | |
| 18 | 240 | 10 | 3 | 68 | 55 | GTF9-182 | 3150 | 67 | GTF9-18G | 525 |

¹Guard (not shown). Order separately by Model Number. Guard adds approximately 1/2" to overall heater dimensions.

Ordering Examples: GTF6-62, 240V, 6 kW, 6-element heater, and GTF6-6G, heater guard, \$1500 + 260 = \$1760. GTF9-122, 12 kW heater, \$2400.