

# Stick Type DMM and DMM/Thermometer

**TRODEKS®**

HHM63C/  
HHM63F

**\$102**

HHM60 Series

**\$60**

Basic Model



- ✓ Brand New Series with CE-Mark Approval
- ✓ Highly Accurate Thermometer with Type K Thermocouple (HHM63C/HHM63F/HHM63K)
- ✓ DATA HOLD Function
- ✓ Models with 0.1°, 1° Resolution
- ✓ Auto-Ranging
- ✓ Stick-Type Easy-to-Hold Design
- ✓ Accuracy: Stated Accuracy at 23 ± 5°C <75% RH
- ✓ Battery Life: 200 Hours
- ✓ Dimensions: 170 H x 44 W x 40 mm D (6.7 x 1.8 x 1.6")
- ✓ Weight: Approx. 150 g (5 oz)
- ✓ Valox Housing to Withstand Accidental Drops
- ✓ CE Marked

HHM64

**\$69**



**HHM64**  
**Stick Type Multimeter**  
3200 count resolution  
Analog bargraph function  
Backlit LCD display  
DCV accuracy: 0.25%

HHM63

**\$86**


Shown slightly smaller  
than actual size



**HHM63**  
**Stick Type Multimeter**  
2500 count resolution  
W/Microprocessor-Based DMM  
DCV Accuracy: 0.25%  
Resistance accuracy: 0.3%  
Backlit LCD display  
Frequency accuracy  
up to ± 0.05%  
Frequency resolution  
up to 0.001 Hz



**HHM63C/HHM63F**  
**Multimeter Thermometer**  
2500 count resolution  
W/microprocessor-based DMM  
DCV accuracy: 0.25%  
Resistance accuracy: 0.3%  
Backlit LCD display  
Frequency accuracy  
up to ± 0.05%  
Frequency resolution  
up to 0.001 Hz  
Type K input  
Temp. accuracy ± 2%

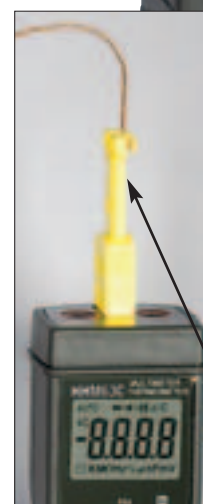

Comes with  
beaded type  
K thermocouple

## Extra Set



**HHM60-TL**  
spare test lead set  
for HHM60 Series,  
**\$6**

## Accessories for Stick DMM's and Thermometers

| Model No. | Price | Description                |
|-----------|-------|----------------------------|
| MN2400    | \$3   | Extra AAA alkaline battery |
| HHM60-TL  | 6     | Extra set of test leads    |
| CAL-3-HHM | 125   | NIST traceable calibration |

All models include **free** soft vinyl carrying case, four AAA alkaline batteries, set of safety test leads, type K beaded wire thermocouple (temperature models only) and complete operator's manual.

# Stick Type Temperature Transducer and Thermometer

Stick Type Temperature Transducer† (no display)

**\$60**

**HH63KF-MV**

(°F measurement)

**HH63KC-MV**

(°C measurement)



**HH63KF-MV/  
HH63KC-MV  
Temperature  
Transducer**

Comes with type K thermocouple,  
Green LED Power-on ,  
Annunciator,  
Overload Protection;  
Accuracy: 0.3% rdg  
1 mV/deg analog output  
for temperature;  
Connects to any DMM  
for display



**Stick Type  
Thermometer**

**\$80**

**HH63K**

**HH63K Stick Type  
Thermometer**

3½ digits 2000 counts  
Reading of MAX,  
DATA HOLD, function  
overload protection  
24 Vac/Vdc  
Accuracy: up to ±0.3%  
°C/°F Switchable  
Comes with beaded  
type K thermocouple  
0.1/1.0° Resolution

**Thermocouple  
Included!**

Temperature models include a  
free 1 m (40") type K insulated  
beaded wire thermocouple with  
subminiature connector and wire  
spool caddy (one per channel).  
**Order a Spare!**  
Model No. SC-GG-K-30-36, \$15

**Shown  
smaller  
than  
actual  
size**

**ALL MODELS AVAILABLE FOR FAST DELIVERY!**

## To Order (Specify Model Number)

|  | Model No.            | HHM64       | HHM63C       | HHM63F       | HHM63       | HH63KF-MV   | HH63KC-MV   | HH63K       |
|--|----------------------|-------------|--------------|--------------|-------------|-------------|-------------|-------------|
| <b>F<br/>E<br/>A<br/>T<br/>U<br/>R<br/>E<br/>S</b> | <b>Price</b>         | <b>\$69</b> | <b>\$102</b> | <b>\$102</b> | <b>\$86</b> | <b>\$60</b> | <b>\$60</b> | <b>\$80</b> |
|  | Resolution (counts)  | 3200        | 2500         | 2500         | 2500        | 2000        | 2000        | 2000        |
|  | Range. Auto          | •           | •            | •            | •           |             |             |             |
|  | Input Impedance Mohm | >10         | >10          | >10          | >10         |             |             |             |
|  | Analog bargraph      | •           |              |              |             |             |             |             |
|  | Analog Output        |             |              |              |             | 1 mV/°F     | 1 mV/°C     |             |
|  | Range °C             |             | -20~1370     |              |             |             | -50~1300°   | -50~1300    |
|  | Range °F             |             |              | -4~2498      |             | -58~2372    |             | -58~2000    |
|  | Backlit LCD          | •           | •            | •            | •           |             |             |             |
|  | Data Hold            | •           | •            | •            | •           |             |             | •           |
|  | Capacitance          |             | 25 µF        | 25 µF        | 25 µF       |             |             |             |
|  | Frequency            |             | 5 MHz        | 5 MHz        | 5 MHz       |             |             |             |
|  | DCV/ACV-autoranging  | 600         | 600          | 600          | 600         |             |             |             |
|  | Continuity           | •           | •            | •            | •           |             |             |             |
|  | Resistance           | •           | 25 MΩ        | 25 MΩ        | 25 MΩ       |             |             |             |
|  | Diode test           | •           | •            | •            | •           |             |             |             |
| <b>DCV<br/>Ω</b>                                   | Basic accuracy, %    | 0.25        | 0.25         | 0.25         | 0.25        |             |             |             |
|  | Basic accuracy, %    | 0.3         | 0.3          | 0.3          | 0.3         |             |             |             |

All models include **free** soft vinyl carrying case, four AAA alkaline batteries, set of safety test leads, type K beaded wire thermocouple (temperature models only) and complete operator's manual.

**Ordering Example:** HH63K, stick thermometer with beaded wire thermocouple, \$80.