


CLEAN WATER 1- OR 3-PHASE IMMERSION HEATER—2½ NPT FITTING

MT-3 Series Starts at **\$330**




MT-330E2/480V/3P, \$575, shown smaller than actual size.

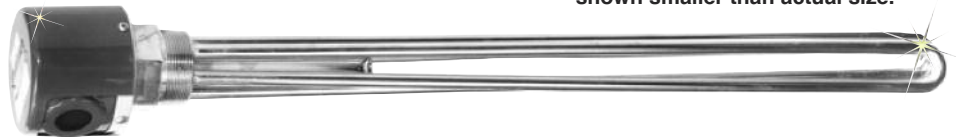

MT-330A/480V/3P, \$330, shown smaller than actual size.

- ✓ Heavy-Duty Construction
- ✓ Models Available with Explosion-Resistant Enclosure
- ✓ 1.2 cm (0.475") Diameter Copper Sheath, Ideal for 6 to 8 pH Liquids
- ✓ 3 to 18 kW
- ✓ 120, 208, 240, and 480 Vac; 1- and 3-Phase Power

Note: This immersion heater should be used with an approved temperature control device to ensure safe operation. See Section P for our selection of process controllers. Not intended for use in hazardous areas. (See previous pages for caution and warnings.)

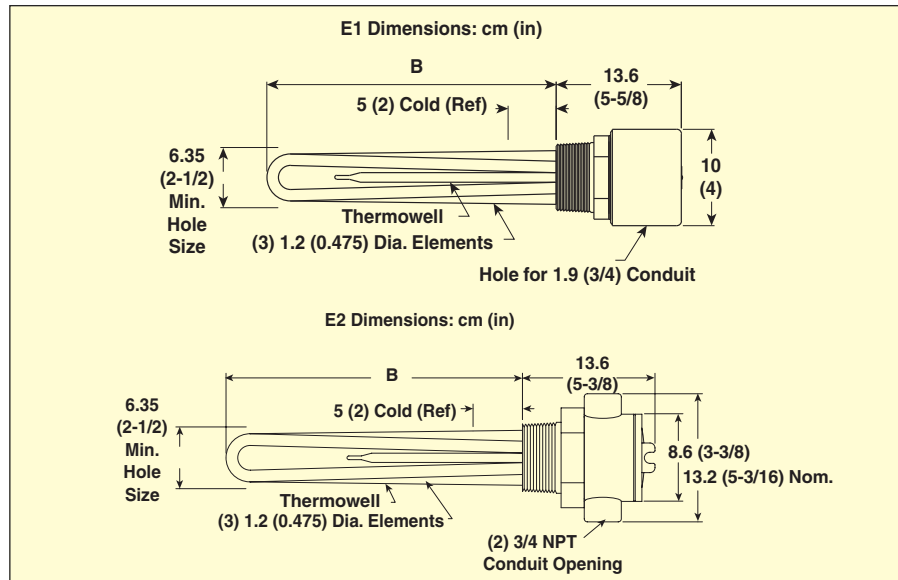

MOST POPULAR MODELS HIGHLIGHTED!

To Order (Specify Model Number)						E1 General Purpose Enclosure ¹			E2 Explosion/Moisture-Res. Encl. ²		
kW	Volts	W/in ²	No. Htg. Elem.	Dim. B cm (in)	Model No.	Price	Wt. kg (lb)	Model No.	Price	Wt. kg (lb)	
3	480	51	3	19 (7½)	MT-330A/**†	\$330	3 (5)	MT-330E2/*	\$575	4 (8)	
3.75	240	52	3	21 (8½)	MT-337A/**†	360	3 (6)	MT-337E2/*	600	4 (9)	
4.5	120	48	3	30 (11¾)	MT-345A/**†	400	3 (6)	MT-345E2/*	650	4 (9)	
6	120	48	3	44 (17¼)	MT-360A/**†	470	4 (8)	MT-360E2/*	725	4 (9)	
7.5	208	53	3	49 (19½)	MT-375A/**†	525	4 (8)	MT-375E2/*	775	4 (9)	
9	208	47	3	62 (24½)	MT-390A/**†	600	6 (12)	MT-390E2/*	850	7 (15)	
12	208	46	3	82 (32¾)	MT-3120A/**†³	750	6 (13)	MT-3120E2/*³	1000	6 (16)	
15	208	46	3	101 (39¾)	MT-3150A/**†³	900	7 (14)	MT-3150E2/*³	1150	8 (17)	
18	208	46	3	120 (47¼)	MT-3180A/**†³	1050	7 (15)	MT-3180E2/3P³	1300	8 (18)	

* Designate voltage: insert "120V" for 120 Vac, "208V" for 208 Vac, "240V" for 240 Vac or "480V" for 480 Vac.

** Designate voltage: insert "208V" for 208 Vac, "240V" for 240 Vac or "480V" for 480 Vac.

† Insert the suffix "3P" after model number for 3-phase power.

¹ Heaters with general purpose enclosures are UL listed and CSA certified.

² Heaters with moisture-resistant/explosion-resistant enclosures are CSA NRTL/C certified.

³ Not UL listed, CSA certified or CSA NRTL/C certified (exceeds 48 amps).

Ordering Examples: MT-330A/240V/3P, 3 kW heater powered by 3-phase 240V, \$330.

MT-337E2/120V/3P, 3 kW heater powered by 3-phase 120V, \$600.