

# IMMERSION HEATER FOR LIGHT WEIGHT OIL APPLICATIONS

MTO-1 Series  
Starts at  
**\$220**





- ✓ 1 1/4 NPT Steel Screw Plug
- ✓ Steel Sheath Elements
- ✓ 10 and 20 W/in<sup>2</sup>
- ✓ 0.5 to 3 kW
- ✓ Without Thermostat
- ✓ 120 and 240V, Single Phase
- ✓ General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure



MTO-105/120, \$220, shown smaller than actual size.

MTO-120E2/120, \$500, shown smaller than actual size.

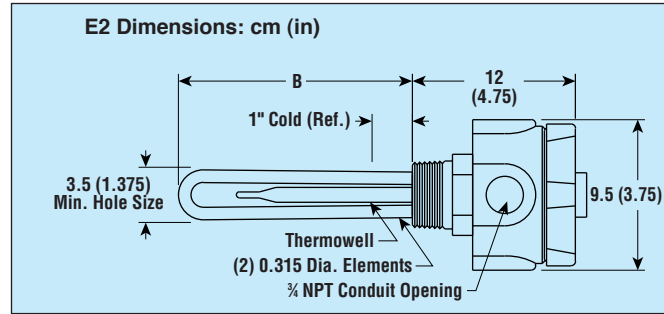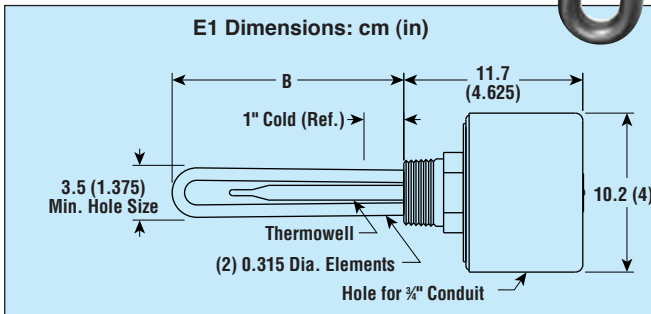

**■ MOST POPULAR MODELS HIGHLIGHTED!**

## To Order (Specify Model Number)

kW	Volts	Phase	W/in <sup>2</sup>	No. Elem.	Dim. B cm (in)	E1 General Purpose <sup>1</sup>			E2 Moisture Res./Explosion Resistant <sup>2</sup>		
						Model No.	Price	Wt. lb (kg)	Model No.	Price	Wt. lb (kg)
0.5	120	1	10	2	32 (12 1/2)	MTO-105/120	\$220	2 (1)	MTO-105E2/120	\$445	5 (2)
0.5	240	1	10	2	32 (12 1/2)	MTO-105/240	220	2 (1)	MTO-105E2/240	445	5 (2)
1	120	1	20	2	32 (12 1/2)	MTO-110/120	235	2 (1)	MTO-110E2/120	460	5 (2)
1	240	1	20	2	32 (12 1/2)	MTO-110/240	235	2 (1)	MTO-110E2/240	460	5 (2)
2	120	1	20	2	66 (26)	MTO-120/120	275	3 (1)	MTO-120E2/120	500	6 (3)
2	240	1	20	2	66 (26)	MTO-120/240	275	3 (1)	MTO-120E2/240	500	6 (3)
3	120	1	20	2	96 (38)	MTO-130/120	320	3 (1)	MTO-130E2/120	550	6 (3)
3	240	1	20	2	96 (38)	MTO-130/240	320	3 (1)	MTO-130E2/240	550	6 (3)

<sup>1</sup> Heaters with general purpose enclosures are UL recognized and CSA certified.

<sup>2</sup> Heaters with moisture resistant/explosion resistant enclosures are CSA NRTL/C certified.

Ordering Examples: MTO-110/240, 1 kW, 1-phase general purpose heater, \$235. MTO-105E2/120, 0.5 kW, 120 Vac, \$445.