

# NEMA TYPE 3R AND 12 FREE-STANDING TWO-DOOR, SINGLE-ACCESS ENCLOSURES

## SCE-FSD Series



- 0.104" Carbon Steel
- Removable and Interchangeable Doors
- Concealed Hinge
- Seams Continuously Welded and Ground Smooth, No Holes or Knockouts
- Strong, Rigid Construction with Stiffeners Welded On Backs of Single Access Boxes
- Lifting Eyes for Easy Handling
- Black Zinc Die Cast Keylocking/ Padlocking Handle
- 3-Point Latching Mechanism
- Latch Rods have Rollers for Easier Door Closing
- Flange Trough Collar Around All Sides of Door Opening
- Removable Print Pocket Provided On Door
- Mounting Channels Welded Horizontally On Sides of Interior Body At Top, Bottom and Middle for Mounting Optional Panels or Rack Mounting Angles
- Oil Resistant Gasket
- Ground Stud on Door



SCE-604818FSD shown smaller than actual size.

### Application

Designed to house a variety of electrical and electronic controls and instruments. Provisions for optional surface mounting or rack mounting of almost any type of equipment. Provides protection from dust, dirt, water and oil. The enclosures are extra deep for applications requiring more interior space.

### Finish


White powder coating inside and ANSI-61 recoatable gray finish outside over phosphatized surfaces. Optional panels are powder coated white.

### Industry Standard IS3

NEMA Type 3R, 12 and 13  
UL Listed Type 3R and 12  
CSA Type 3R and 12  
IEC 60529 IP 55

**Note:** Drip shield required for NEMA 3R rating.

**Full, Half and Side Swing-Out Sub-Panels Available for These Models, Please Contact Sales**

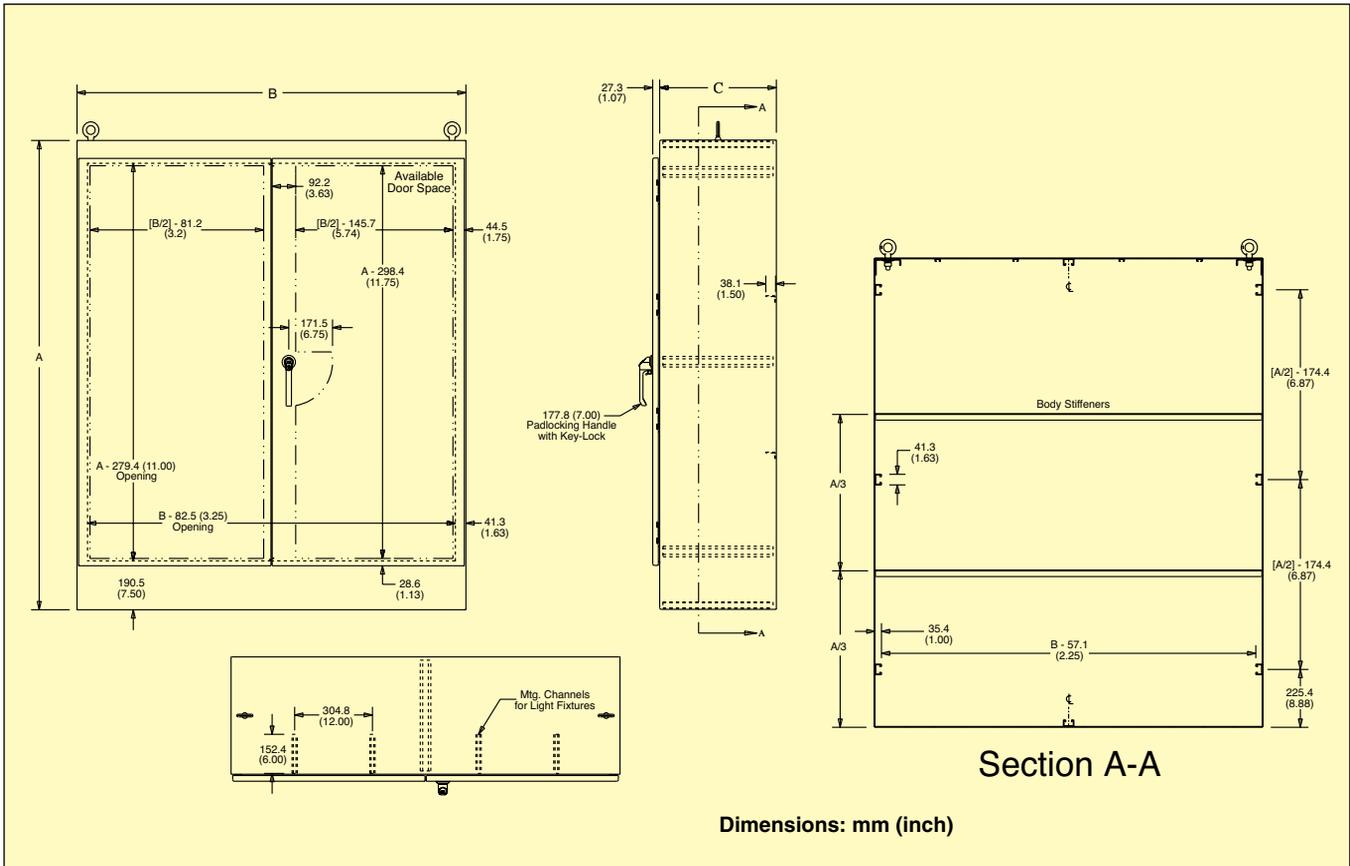

To Order		HEIGHT (inch)	WIDTH (inch)	DEPTH (inch)
MODEL NO.	DESCRIPTION	(A)	(B)	(C)
<b>SINGLE ACCESS ENCLOSURES</b>				
SCE-604818FSD	Type 3R and 12 free-standing two door	60.00	48.00	18.00
SCE-724818FSD	Type 3R and 12 free-standing two door	72.00	48.00	18.00
SCE-724824FSD	Type 3R and 12 free-standing two door	72.00	48.00	24.00
SCE-726018FSD	Type 3R and 12 free-standing two door	72.00	60.00	18.00
SCE-726024FSD	Type 3R and 12 free-standing two door	72.00	60.00	24.00
SCE-726036FSD	Type 3R and 12 free-standing two door	72.00	60.00	36.00
SCE-727218FSD	Type 3R and 12 free-standing two door	72.00	72.00	18.00
SCE-727224FSD	Type 3R and 12 free-standing two door	72.00	72.00	24.00
SCE-904820FSD	Type 3R and 12 free-standing two door	90.00	48.00	20.00
SCE-907220FSD	Type 3R and 12 free-standing two door	90.00	72.00	20.00
SCE-907224FSD	Type 3R and 12 free-standing two door	90.00	72.00	24.00
SCE-907236FSD	Type 3R and 12 free-standing two door	90.00	72.00	36.00
<b>DRIP SHIELDS*</b>				
SCE-DS48N4	Drip shield for 48" wide outdoor enclosure			
SCE-DS60N4	Drip shield for 60" wide outdoor enclosure			
SCE-DS72N4	Drip shield for 72" wide outdoor enclosure			

\* Drip shield required to meet NEMA 3R ratings.

**Ordering Examples:** SCE-604818FSD, Type 3R and 12 free standing, two-door, single access indoor/outdoor enclosure.

SCE-726024FSD, Type 3R and 12 free standing, two-door, single access indoor/outdoor enclosure, 72 H x 60 W x 24" D, and SCE-DS60N4, dripshield.