

# Mix-and-Match Series Digital Stem Thermometers

TRODEKS®

## Digital Pocket Thermometer

HH65/HH65Y  
**\$20**



*Cheaper by the Dozen!  
Purchase Any Combination of 12 Units and Save 20%*

HH65, \$20, with plastic sheath (included), shown smaller than actual size.

- ✓ Auto Power-Off (10 min)
- ✓ Drop Resistant
- ✓ Water Resistant
- ✓ Pocket Clip
- ✓ Velcro Strap and Magnet (HH65Y Only)

### Specifications

**Measurement Range:** -40 to 150°C (-40 to 302°F)  
**Accuracy:** ±1°C (±1.8°F)  
**Resolution:** 0.1°  
**Response Time:** 15 seconds  
**Dimensions:** 159 x 23 x 10 mm (6.25 x 0.9 x 0.4")  
**Probe Length:** 89 mm (3.5")  
**Power:** LR44 battery (included)  
**Button Functions:** ON/OFF, data hold, and °C/°F



HH65Y, \$20, with plastic sheath (included), shown smaller than actual size.

*ALL MODELS AVAILABLE FOR FAST DELIVERY!*

## Pocket Tester For Temperature and Relative Humidity



PTH-1XA, \$52, shown actual size.

PTH-1XA  
**\$52**



- ✓ Simultaneous Display of Temperature and Humidity
- ✓ Auto Power-Off (20 min)

- ✓ Memory (Min/Max)
- ✓ °C/°F Switch
- ✓ On/Off Switch
- ✓ Belt or Pocket Clip
- ✓ Batteries Included
- ✓ Pocket Sized
- ✓ Reset Switch
- ✓ Hold Switch

### Specifications

**Color:** Dark grey  
**Power Supply:** 1 button cell included (CR2032)  
**Humidity Range:** 5 to 95% RH  
**Accuracy:** 10 to 90% RH ±3%, all other ranges ±5%  
**Temperature Range:**  
 ±1°C (±2°F): 0 to 40°C (32 to 104°F)  
 ±1°C (±2°F): 0 to 40°C (32 to 104°F)  
**Response Time:** 80 s typical  
**Dimensions:** 150 x 20 x 15 mm (5.9 x 0.8 x 0.6")

L

# Waterproof Keypad Thermometer

TPD572W

**\$21**



**ALL MODELS AVAILABLE FOR FAST DELIVERY!**

- ✓ Max/Min
- ✓ C°/F° Switchable
- ✓ Data Hold
- ✓ Auto Power-Off

## Specifications

**Measurement Range:** -50 to 300°C (-58 to 572°F)  
**Accuracy:** ±2°F to ±4°F  
**Resolution:** 0.1°  
**Sampling Rate:** 1 second  
**Probe Length:** 76 mm (3")

TPD572W, \$21, shown smaller than actual size.



# Digital Stem Thermometer

- ✓ Auto Power-Off (1 hour)
- ✓ Protective Plastic Sheath
- ✓ Low Battery Indicator

TPD310

**\$20**



## Specifications

**Measurement Range:** -50 to 150°C (-58 to 302°F)  
**Accuracy:** ±1.0°C (±1.8°F)  
**Resolution:** 0.1° for -19.9 to 199.9, otherwise 1°  
**Sampling Rate:** 1 second  
**Probe Length:** 130 mm (5.12")  
**Ambient Temperature:** 10 to 50°C (14 to 122°F)  
**Power Source:** One LR44 battery (included)  
**Button Functions:** ON/OFF and °C/°F

TPD310, \$20, shown smaller than actual size.



# Digital Stem Thermometer

TPD32

**\$21**

TPD33

**\$23**



**Cheaper by the Dozen! Purchase Any Combination of 12 Units and Save 20%**

- ✓ On/Off Switch
- ✓ °C or °F Switchable
- ✓ Auto Power-Off
- ✓ Stainless Steel Probe
- ✓ Protective Probe Cover

## Specifications

**Measurement Range:**  
 TPD32: -50 to 150°C (-58 to 302°F)  
 TPD33: -50 to 280°C (-58 to 536°F)  
**Accuracy:**  
 TPD32: ±1°C from -20 to 120°C otherwise, ±2°C; ±2°F from -4 to 248°F otherwise, ±4°F  
 TPD33: ±1°C from -20 to 120°C; ±2°C from -20 to -50°C and 120 to 150°C; ±4°C from 150 to 200°C; ±6°C from 200 to 280°C; ±2°F from -4 to 248°F; ±4°F from -4°F to -58 and 248 to 302°F; ±8°F from 302 to 392°F; ±11°F from 392 to 536°F  
**Probe Size:**  
 TPD32: 3.5 Dia. x 200 mm L (0.14 x 8")  
 TPD33: 3.5 Dia. x 200 mm L (0.14 x 8")

## Sampling Time:

TPD32: 1 second  
 TPD33: 0.5 second

## Unit Weight (With Probe Cover):

TPD32: 23 g (0.7 oz)  
 TPD33: 28 g (0.9 oz)

## Unit Size: 20 Dia. x 58 mm L (0.8 x 2.3")

**Display Resolution:** 0.1° from -19.9 to 199.9°; 1° other ranges

**Display Digit Size:** 6 H x 3 mm W (0.24 x 0.12")

**Auto Power-Off:** After 10 minutes

**Battery:** One 1.5 V, PH-BATT-3 (included)

**Ambient Temp:** -10 to 50°C (14 to 122°F)

**Button Functions:** On/off and °C/°F

TPD32, \$21, with case (included), shown smaller than actual size.



# Digital Stem Thermometer

TPD36  
**\$17**

TPD37  
**\$26**



- ✓ On/Off Switch
- ✓ °C or °F Switchable
- ✓ Auto Power-Off
- ✓ Stainless Steel Probe
- ✓ Protective Probe Cover

## Specifications

### Measurement Range:

TPD36: -50 to 150°C (-58 to 302°F)

TPD37: -50 to 280°C (-58 to 536°F)

### Accuracy:

TPD36: ±1°C from -20 to 120°C otherwise, ±2°C; ±2°F from -4 to 248°F otherwise, ±4°F

TPD37: ±1°C from -20 to 120°C; ±2°C from -20 to -50°C and 120 to 150°C; ±4°C from 150 to 200°C; ±6°C from 200 to 280°C; ±2°F from -4 to 248°F; ±4°F from -4°F to -58 and 248 to 302°F; ±8°F from 302 to 392°F; ±11°F from 392 to 536°F

### Probe Size:

TPD36: 3.5 Dia. x 125 mm L (0.14 x 5")

TPD37: 3.5 Dia. x 125 mm L (0.14 x 5")

### Sampling Time:

TPD36: 1 second

TPD37: 0.5 second

### Unit Weight (With Probe Cover):

TPD36: 21 g (0.7 oz)

TPD37: 26 g (0.9 oz)

TPD36, \$17, with case (included), shown smaller than actual size.

**ALL MODELS AVAILABLE FOR FAST DELIVERY!**

**Unit Size:** 17 H x 33 D x 36 mm L (0.7 x 1.3 x 1.4")

**Display Resolution:** 0.1° from -19.9 to 199.9°; 1° other ranges

**Display Digit Size:** 6 H x 3 mm W (0.24 x 0.12")

**Auto Power-Off:** After 10 minutes

**Battery:** One 1.5 V, PH-BATT-3 (included)

**Ambient Temp:** -10 to 50°C (14 to 122°F)

**Button Functions:** On/off and °C/°F

# Digital Stem Thermometer

TPD300E  
**\$17**

**Cheaper by the Dozen!**  
Purchase Any Combination of 12 Units and Save 20%

- ✓ Anti-roll Flat Base
- ✓ Large Display
- ✓ Pocket Clip
- ✓ Protective Plastic Sheath

## Specifications

**Temperature Range:** -40 to 150°C (-40 to 302°F)

**Accuracy:** ±1.0°C (±1.8°F)

**Resolution:** 0.1°

**Sampling Rate:** 1 second

**Probe Length:** 114.3 mm (4.5")

**Power Source:** Two LR44 batteries (included)

**Switch Functions:** ON/OFF and °C/°F

TPD300E, \$17, shown smaller than actual size.



# Digital Min/Max Thermometer


TPD40

**\$21**



**ALL MODELS  
AVAILABLE  
FOR FAST  
DELIVERY!**

- ✓ °C/°F Switch
- ✓ On/Off Switch
- ✓ Min/Max Function
- ✓ Plastic Sheath
- ✓ Pocket Clip
- ✓ -26 to 200°C (-14 to 392°F)
- ✓ 100 mm L (4") Stainless Steel Probe
- ✓ 47 mm (1.9") Dia. Head
- ✓ Accuracy: ±1°C (1.8°F) from -10 to 82°C (14 to 180°F)

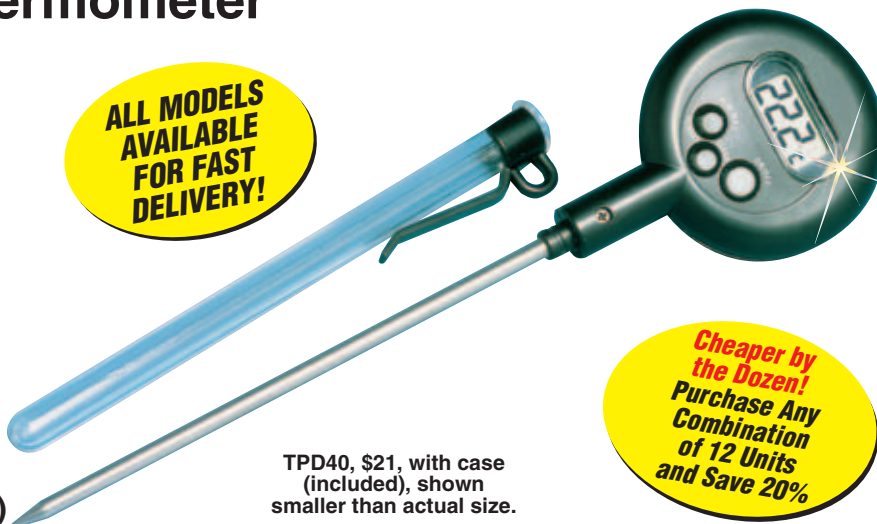

TPD40, \$21, with case (included), shown smaller than actual size.

**Cheaper by  
the Dozen!  
Purchase Any  
Combination  
of 12 Units  
and Save 20%**

# Surface Probe Thermometer

TPD570

**\$25**

- ✓ Surface Style Probe
- ✓ Flat Base
- ✓ Wide Measurement Range
- ✓ Low Battery Indicator

## Specifications

**Measurement Range:** -50 to 300°C (-58 to 572°F)

**Accuracy:** ±1°C for -30 to 150°C; ±2°C for 151 to 250°C otherwise >2°C

**Resolution:** 0.1° for -19.9 to 199.9, otherwise 1°

**Sampling Rate:** 1 second

**Probe Length:** 127 mm (5")

**Ambient Temperature:** -10 to 50°C (14 to 122°F)

**Power Source:** One 393 battery (included)

**Button Functions:** On/off and °C/°F



TPD570, \$25, shown smaller than actual size.

# Digital Stem Thermometer

TPD9268

**\$36**

- ✓ Auto Power-Off (1 hour)
- ✓ Plastic Sheath with Pocket Clip
- ✓ Large LCD

## Specifications

**Measurement Range:** -50 to 300°C (-58 to 572°F)

**Accuracy:** ±1°C for -30 to 250°C, otherwise more than ±2°C

**Resolution:** 0.1° for -19.9 to 199.9, otherwise 1°

**Sampling Rate:** 1 second

**Probe Length:** 250 mm (9.85")

**Ambient Temperature:** -10 to 50°C (14 to 122°F)

**Power Source:** One LR44 battery (included)

**Button Functions:** On/off and °C/°F



TPD9268, \$36, shown smaller than actual size.

# Digital Stem Thermometer

TPD350  
\$23

- ✓ Hold/Max
- ✓ Auto Power-Off (10 min)
- ✓ Self Calibrateable
- ✓ Plastic Sheath
- ✓ Pocket Clip

## Specifications

**Measurement Range:** -40 to 232°C (-40 to 450°F)

**Accuracy:** ±0.5°C for 55 to 82°C; ±4°C for 177 to 232°C; ±2°C for otherwise

**Resolution:** 0.1°

**Sampling Rate:** 1 second

**Power Source:** One LR44 battery (included)

**Storage Temperature:** -20 to 60°C

**ALL MODELS AVAILABLE FOR FAST DELIVERY!**

**Cheaper by the Dozen! Purchase Any Combination of 12 Units and Save 20%**



TPD350, \$23, with sheath (included), shown smaller than actual size.

# Digital Stem Thermometer

TPD340  
\$24

- ✓ Auto Power-Off (10 min)
- ✓ Plastic Sheath
- ✓ Pocket Clip

## Specifications

**Measurement Range:** -50 to 280°C (-58 to 536°F)

**Accuracy:** ±1°C for -20 to 120°C; ±2°C for -20 to -50°C and 120 to 150°C; ±4°C for 150 to 200°C; ±6°C for 200 to 280°C

**Resolution:** 0.1° for -19.9 to 199.9, otherwise 1°

**Sampling Rate:** 0.5 second

**Probe Size:** 3.5 dia x 200 mm L (0.14 x 8")

**Power Source:** One LR44 battery (included)

**Ambient Temperature:** -10 to 50°C (14 to 122°F)

**Button Functions:** On/off and °C/°F



TPD340, \$24, with sheath (included), shown smaller than actual size.



# Temperature Tester

TPD38  
\$23

TPD39  
\$24

- ✓ On/Off Switch
- ✓ °C or °F Switchable
- ✓ Auto Power-Off
- ✓ Stainless Steel Probe
- ✓ Protective Probe Cover

## Specifications

**Measurement Range:**

TPD38: -50 to 150°C (-58 to 302°F)

TPD39: -50 to 280°C (-58 to 536°F)

**Accuracy:**

TPD38: ±1°C from -20 to 120°C otherwise, ±2°C; ±2°F from -4 to 248°F; otherwise, ±4°F

TPD39: ±1°C from -20 to 120°C; ±2°C from -20 to -50°C and 120 to 150°C; ±4°C from 150 to 200°C; ±6°C from 200 to 280°C; ±2°F from -4 to 248°F; ±4°F from -4°F to -58 and 248 to 302°F; ±8°F from 302 to 392°F; ±11°F from 392 to 536°F

**Probe Size:**

TPD38: 3.5 Dia. x 200 mm L (0.14 x 8")

TPD39: 3.5 Dia. x 200 mm L (0.14 x 8")


**Sampling Time:**

TPD38: 1 second

TPD39: 0.5 second



TPD38, \$23, with case (included), shown smaller than actual size.

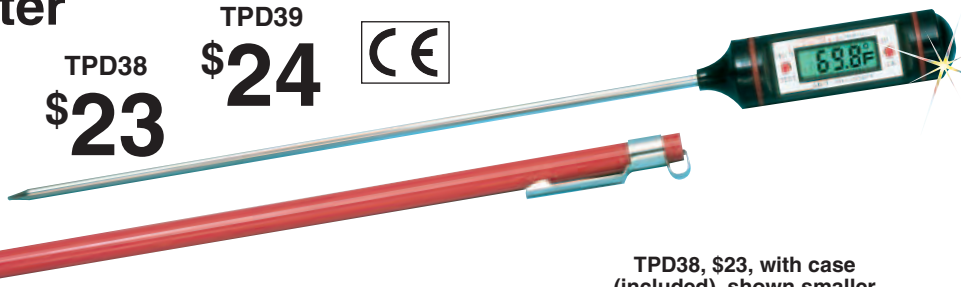

**Unit Weight (With Probe Cover):**

TPD38: 23 g (0.8 oz)

TPD39: 28 g (0.99 oz)

**Unit Size:** 20 Dia. x 72 mm L (0.8 x 2.8")

**Display Resolution:** 0.1° from -19.9 to 199.9°; 1° other ranges

**Display Digit Size:** 6 H x 3 mm W (0.24 x 0.12")

**Auto Power-Off:** After 10 minutes

**Battery:** One 1.5 V, PH-BATT-3 (included)

**Ambient Temp:** -10 to 50°C/14 to 122°F

**Button Functions:** On/off and °C/°F