

CLEAN WATER IMMERSION HEATER WITH INTEGRAL THERMOSTAT

1 NPT Fitting


- ✓ 1" Brass Screw Plug
- ✓ Copper Sheath for Clean Water Applications
- ✓ Integral Bulb and Capillary Thermostat—3 Temperature Ranges Available
- ✓ UL Listed with General Purpose NEMA-1 Rated Enclosure

ARTM Series screw plug immersion heaters are designed for direct contact heating in clean water applications.

SPECIFICATIONS

Wattage: 0.75 to 3 kW
Power: 120 or 240 Vac, 1 phase
Sheath: 0.800 cm (0.315") dia. copper
Screw Plug: 1 NPT brass
Thermostat: bulb and capillary type, 3 temperature ranges available; 60 to 187°F, 60 to 240°F, or 0 to 127°F
Watt Density: 64-78 W/in²
Enclosure: General purpose NEMA-1; optional moisture tight/explosion resistant enclosure meets Class I, groups C & D, Div. 1 & 2, Class II, Groups E, F & G, Div. 1&2, Class III, Div. 1 & 2
Third Party Approvals: UL listed with general purpose enclosures

Note: The integral thermostat functions as a temperature control only. this not a fail safe device. An approved pressure or temperature control should be used with these heaters to assure safe operation. See section P for our full selection of control devices.

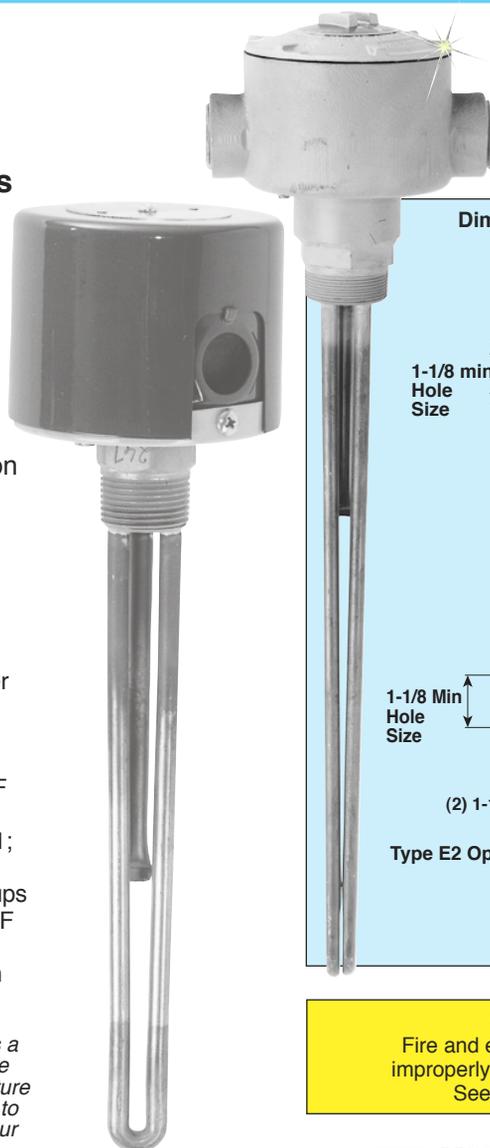


ARTM Series Starts at


\$205



Dimensions: cm (in)

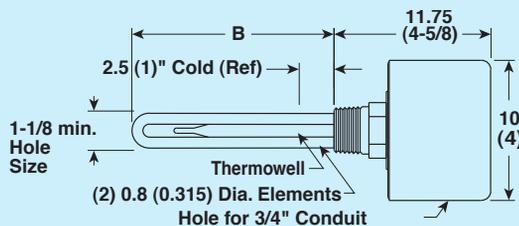

General Purpose Terminal Enclosure--E1

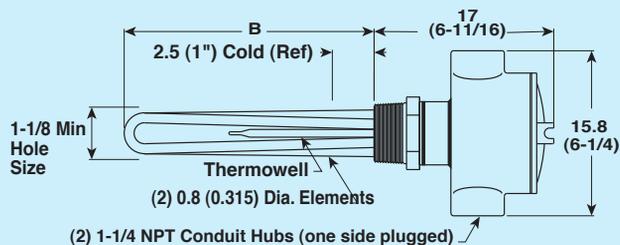

Type E2 Optional Moisture Tight/Explosion Resistant Enclosure

(Explosion resistant enclosure - not intended for use in hazardous areas)

CAUTION AND WARNING!

Fire and electrical shock may result if products are used improperly or installed or used by non-qualified personnel. See inside back cover for additional warning.

MOST POPULAR MODELS HIGHLIGHTED!

To Order (Specify Model Number)

kW	Phase	W/in ²	No. Htg. Elem.	Dim.B cm (")	Temp. Range (60 to 187°F)		Temp. Range (60 to 240°F)		Temp. Range (0 to 127°F)		Wt. kg (lb)
					Model No.	Price	Model No.	Price	Model No.	Price	
0.75	1	64	1	16 (6 ⁵ / ₁₆)	†ARTM-750/*	\$205	†ARTM-750TH/*	\$205	†ARTM-750TL/*	\$205	1 (2.25)
1.0	1	85	1	16 (6 ⁵ / ₁₆)	†ARTM-1000/*	215	†ARTM-1000TH	215	†ARTM-1000TL/*	215	1 (2.25)
1.25	1	83	1	21 (8 ¹ / ₁₆)	†ARTM-1250/*	225	†ARTM-1250TH/*	225	†ARTM-1250TL/*	225	1 (2.50)
1.5	1	86	1	24 (9 ¹ / ₄)	†ARTM-1500/*	235	†ARTM-1500TH/*	235	†ARTM-1500TL/*	235	1 (2.50)
2.0	1	83	1	31 (12 ¹ / ₄)	ARTM-2000/*	250	ARTM-2000TH/*	250	ARTM-2000TL/*	250	1 (2.75)
2.5	1	79	1	41 (16 ¹ / ₄)	ARTM-2500/*	270	ARTM-2500TH/*	270	ARTM-2500TL/*	270	1 (3.00)
3.0	1	78	1	50 (19 ⁷ / ₁₆)	ARTM-3000/240	285	ARTM-3000TH/240	285	ARTM-3000TL/240	285	1 (3.25)

† U.L. Listed

* Designate voltage, insert "120" for 120 Vac or "240" for 240 Vac. Those model numbers already containing /240 are only available in that voltage. To order with the optional E2 enclosure, insert "E2" into the model number as shown, ARTM-750E2/240, add \$430 to base price.

Ordering Example: ARTM-1250E2TH240 is a 1.25kW heater with thermostat range 60 to 240°F powered by 240 Vac with moisture tight explosion resistant enclosure, \$225 + 460 = \$685 (Not intended for use in hazardous areas). Note: add 1 kg (3 lb) to weight listed if ordered with E2 enclosure.