



SPAN TEMPERATURE-COMPENSATION RESISTOR

SGN-2/20-E
Starts at
\$19
Pkg of 5

SPECIFICATIONS

Foil Measuring Grid:

Nickel foil 5 microns thick

Carrier: Polyimide

Substrate Thickness: 20 microns


Cover Thickness: 25 microns

Tolerance in Ω : $\pm 1 \Omega$

Temp Coefficient of Resistance:


0.6%/°C (0.34%/°F)

Temperature Range: 0 to 100°C (32 to 212°F)

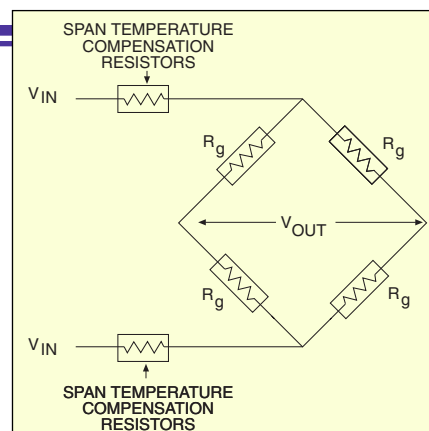

MOST POPULAR MODELS HIGHLIGHTED!

To Order (Specify Model Number)


TEMPERATURE COMPENSATION RESISTORS ENCAPSULATED	MODEL NO.	PRICE PER PKG OF 5	NOMINAL RESISTANCE (Ω)	DIMENSIONS mm (in)*			
				GRID		CARRIER	
				A	B	C	D
 Typical resistor pattern.	SGN-2/20-E	\$19	20	1.9 (0.075)	3 (0.118)	4.8 (0.189)	4 (0.157)
	SGN-2/25-E	19	25	1.9 (0.075)	3 (0.118)	4.8 (0.189)	4 (0.157)
	SGN-2/30-E	19	30	1.9 (0.075)	3 (0.118)	4.8 (0.189)	4 (0.157)
	SGN-3/10-E	19	10	3.2 (0.126)	3.2 (0.126)	8.6 (0.339)	5.2 (0.205)
	SGN-3/12-E	\$19	12	3.2 (0.126)	3.2 (0.126)	8.6 (0.339)	5.2 (0.205)
	SGN-3/34-E	19	34	3 (0.118)	3.2 (0.126)	7.3 (0.287)	4.8 (0.189)
	SGN-3/36-E	19	36	3 (0.118)	3.2 (0.126)	7.3 (0.287)	4.8 (0.189)
	SGN-4/14-E	19	14	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)
	SGN-4/16-E	\$19	16	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)
	SGN-4/20-E	19	20	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)
	SGN-4/24-E	19	24	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)
	SGN-4/28-E	19	28	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)
	SGN-4/30-E	\$19	30	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)
	SGN-4/32-E	19	32	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)
	SGN-4/48-E	19	48	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)
	SGN-4/60-E	19	60	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)

DISCOUNT SCHEDULE

1 to 10 pkgs	Net
11 to 24 pkgs	.5%
25 to 49 pkgs	.10%
50 and up and OEM	Consult Factory

Note: For strain gage accessories see pages E-56 to E-59.

Ordering Example: SGN-4/28-E, 28 Ω nominal-resistance span temperature-compensation resistor, \$19.

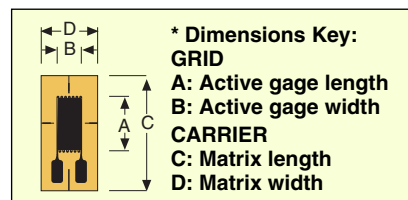


SPAN TEMPERATURE-COMPENSATION, BRIDGE-BALANCING, AND ZERO TEMPERATURE-COMPENSATION RESISTORS




SPECIFICATIONS	RES-C	RES-N
Foil Measuring Grid	Constantan foil 5 microns thick	Nickel foil 5 microns thick
Carrier	Polyimide	Polyimide
Substrate Thickness	20 microns	20 microns
Tolerance in Ω	$\pm 1 \Omega$	$\pm 1 \Omega$
Temp Coefficient of Resistance	—	0.6%/°C (0.34%/°F)
Temperature Range	-75 to 200°C (-100 to 392°F)	0 to 100°C (32 to 212°F)

MOST POPULAR MODELS HIGHLIGHTED!

To Order (Specify Model Number)

TEMPERATURE-COMPENSATED RESISTORS OPEN FACE	MODEL NO.	PRICE PER PKG OF 5	NOMINAL RESISTANCE (Ω)	DIMENSIONS mm (in)*			
				GRID		CARRIER	
				A	B	C	D
 Typical resistor pattern.	SGN-2/20-PN	\$16	20	1.9 (0.075)	3 (0.118)	4.8 (0.189)	4 (0.157)
	SGN-2/25-PN	16	25	1.9 (0.075)	3 (0.118)	4.8 (0.189)	4 (0.157)
	SGN-2/30-PN	16	30	1.9 (0.075)	3 (0.118)	4.8 (0.189)	4 (0.157)
	SGN-3/10-PN	16	10	3.2 (0.126)	3.2 (0.126)	8.6 (0.339)	5.2 (0.205)
	SGN-3/12-PN	\$16	12	3.2 (0.126)	3.2 (0.126)	8.6 (0.339)	5.2 (0.205)
	SGN-3/34-PN	16	34	3 (0.118)	3.2 (0.126)	7.3 (0.287)	4.8 (0.189)
	SGN-3/36-PN	16	36	3 (0.118)	3.2 (0.126)	7.3 (0.287)	4.8 (0.189)
	SGN-4/14-PN	16	16	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)
	SGN-4/16-PN	\$16	16	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)
	SGN-4/20-PN	16	20	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)
	SGN-4/24-PN	16	24	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)
	SGN-4/28-PN	16	28	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)
	SGN-4/30-PN	\$16	30	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)
	SGN-4/32-PN	16	32	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)
	SGN-4/48-PN	16	48	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)
	SGN-4/60-PN	16	60	4 (0.157)	3.2 (0.126)	8.8 (0.346)	4.8 (0.189)

BRIDGE-BALANCING AND ZERO TEMPERATURE-COMPENSATION RESISTORS

	RES-2C	\$10	2	3.4 (0.134)	6.3 (0.248)	4.6 (0.181)	6.7 (0.264)
	RES-5C	10	5	3.4 (0.134)	6.3 (0.248)	4.6 (0.181)	6.7 (0.264)
	RES-2N	10	2	3.4 (0.134)	6.3 (0.248)	4.6 (0.181)	6.7 (0.264)
	RES-5N	10	5	3.4 (0.134)	6.3 (0.248)	4.6 (0.181)	6.7 (0.264)

DISCOUNT SCHEDULE

1 to 10 pkgs	Net
11 to 24 pkgs5%
25 to 49 pkgs10%
50 and up and OEM . . .	Consult Factory

* For dimensions key, see page E-61.

Note: For strain gage accessories see pages E-56 to E-59.

Ordering Example: SGN-4/28-PN, 28 Ω nominal-resistance span temperature-compensation resistor, \$16.