

Extruder RTD Probes With Compression Fittings

- ✓ Ideal for Plastic Process Machinery
- ✓ 100 Ω Class “B” Thin-Film DIN Platinum Element
- ✓ 4.75 mm (3/16") Diameter, 304 Stainless Steel Sheath
- ✓ 1/8 NPT Brass Compression Fitting Standard
- ✓ 1.5 m (60") Flex Cable Standard
- ✓ Temperature Range to 260°C (500°F) Continuous [Optional 500°C (932°F) Cable Available]
- ✓ 3-Wire Construction Color Coded Red/Red/White Per IE/ASTM-E-1137

CFTF Series




CFTF-000-RTD-2-60-1
shown smaller
than actual size.

#26 AWG stranded
nickel-plated
copper, PFA
jacketed with
flex armor

Comes standard
with OTP connector
or spade lugs,
see table below.

BTC Adaptors
Available Online

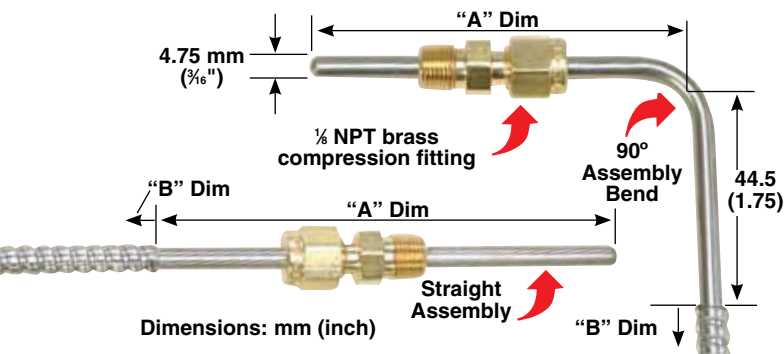

To Order

Model Number	Termination	Bend	“A” Dim mm (inch)
CFTF-000-RTD-2-60-1	Spade Lugs	Straight	50 (2)
CFTF-000-RTD-2-60-2	OTP Connector	Straight	50 (2)
CFTF-000-RTD-4-60-1	Spade Lugs	Straight	100 (4)
CFTF-000-RTD-4-60-2	OTP Connector	Straight	100 (4)
CFTF-090-RTD-2-60-1	Spade Lugs	90°	50 (2)
CFTF-090-RTD-2-60-2	OTP Connector	90°	50 (2)
CFTF-090-RTD-4-60-1	Spade Lugs	90°	100 (4)
CFTF-090-RTD-4-60-2	OTP Connector	90°	100 (4)


Adaptors for insertion and pipe clamp use also available, visit us online for complete information.

* For other lengths of armoured cable, change “60” in model number to length desired for an additional cost per foot over 5' (60"). For high temperature construction (500°C), add “-CC” to the end of model number for an additional cost.

** Other A lengths available, for an additional cost per inch over 6".

Ordering Example: CFTF-000-RTD-2-60-1, straight compression style, “Z” dimension, 60" cable, lug terminations.

How are TRODEX’s Model Numbers Constructed?

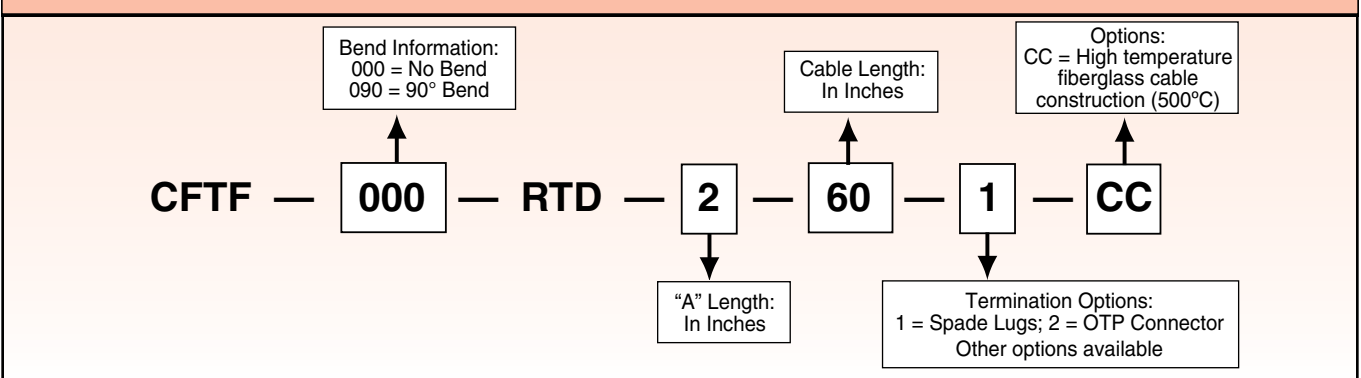

Ordering Example: CFTF-000-RTD-2-60-1, spade lugs.