

Wireless and High Accuracy Data Logger/Thermometers

HH806 Series



Standard
No Points

HH806AW
Comes with Windows
software, USB cable,
wireless receiver and
AC adaptor, and
2 thermocouples

- ✓ **Wireless Models**
HH806W, HH806AW
- ✓ **Dual Inputs**
- ✓ **7 Thermocouple Types**
- ✓ **Triple Display**
- ✓ **Data Logging**
- ✓ **Includes NIST-Traceable Calibration Certificate (No Points)**
- ✓ **High/Low Alarm (Audible)**
- ✓ **Auto Power-Off**
- ✓ **MAX/MIN/MAX/MIN/AVG/REL/HOLD**
- ✓ **Thermocouple Offset**
- ✓ **Optional USB Interface**
- ✓ **Optional AC Adaptor**

HH806AU
Features built-in USB
port for use with optional
windows software

Wireless Models
Available! Monitors
Up to 10 Different
Meters With
1 Receiver


The HH806 represents the top of the line in the HH800 series of handheld thermometers. All of the HH806 versions feature exceptional 0.05% basic accuracy and include a triple display as well as data logging capabilities. At a push of a button the HH806W can store up to 128 samples on demand, and at a user specified logging interval up to 1024 in data logging mode. The HH806AU and HH806AW expand the data logging capabilities further and allow storage of up to 256 samples on demand and up to 16,000 in data logging mode. All versions of the HH806 feature three easy to read displays. Two 4½ digit displays are selectable for T1 or T2 and the third 6 digit display can be used for T1-T2 or to show the current date and time. Windows software is available for all models but is included with the HH806AW, as is the USB cable, wireless receiver, and AC adaptor (HH806AW only).

Specifications

Measurement Range:

- Type K:** -200 to 1372°C (-328 to 2501°F)
- Type J:** -210 to 1200°C (-346 to 2192°F)
- Type T:** -200 to 400°C (-328 to 752°F)
- Type E:** -220 to 1000°C (-364 to 1832°F)
- Type R:** 0 to 1767°C (32 to 3212°F)
- Type S:** 0 to 1767°C (32 to 3212°F)
- Type N:** -50 to 1300°C (-58 to 2372°F)


Accuracy: Stated accuracy at
23°C ±5°C, <75% RH

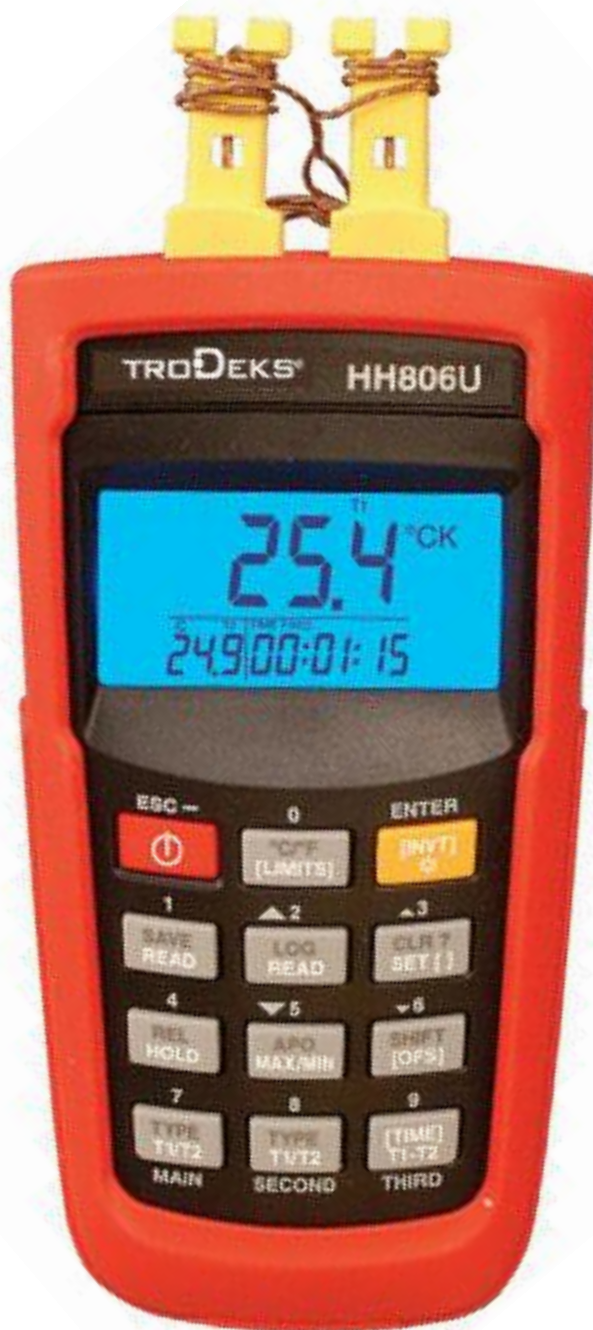

HH806AW, shown
actual size.

Free Thermocouple Included!

These models include a free 1 m (40") Type K insulated beaded wire thermocouple with subminiature connector and wire spool caddy (1 per channel). **Order a Spare!**
Model No. SC-TT-K-30-36.

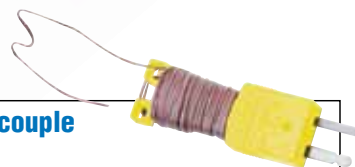

Type K/J/T/E:

±(0.05% rdg + 0.3°C) -50 to 1372°C
 ±(0.05% rdg + 0.7°C) -50 to -210°C
 ±(0.05% rdg + 0.6°F) -58 to 2501°F
 ±(0.05% rdg + 1.4°F) -58 to -346°F

Type N:

±(0.05% rdg + 0.8°C) -50 to 0°C
 ±(0.05% rdg + 0.4°C) 0 to 1300°C
 ±(0.05% rdg + 1.6°F) -58 to 32°F
 ±(0.05% rdg + 0.8°F) 32 to 2372°F

Type R/S:

±(0.05% rdg + 2 0°C to 1767°C
 ±(0.05% rdg + 4 32°F to 3212°F

Operating Environment: 0 to 50°C
 (32 to 122°F) at <70% RH

Storage Temperature: -20 to 60°C
 (-4 to 140°F), 0 to 80% RH with
 battery removed

Battery: 4 x 1.5V "AAA" (included)

Dimensions: 160 H x 83 W x 38 mm D
 (6.3 x 3.3 x 1.5")

Wireless Features:

Frequency Range: USA 900 MHz

European 868.0 to 868.6 MHz

Current Consumption: 5 to 20 mA

Approximate Range: 25 m (75')

To Order

Model No.	HH806W (Wireless)	HH806AU	HH806AW (Wireless)
Units	°C/°F	°C/°F	°C/°F
Display	Triple Display	Triple Display	Triple Display
Input Types	K/J/T/E/R/S/N	K/J/T/E/R/S/N	K/J/T/E/R/S/N
Data Storage	128 on demand + 1024 in logging mode	256 on demand + 16000 in logging mode	256 on demand + 16000 in logging mode
No. of Inputs	2	2	2
Wireless	Yes	No	Yes
USB Port	No	Yes	Yes
DC Power Jack	No	Yes	Yes
Resolution	0.1° to 1999°; 1° above (auto ranging)		

Note: All wireless units are USA, 900 Mhz frequency band versions. For European 868.0 Mhz-868.6 Mhz frequency band versions, add suffix "E", no additional charge.

Comes complete with NIST certificate (no points), 4 "AAA" batteries, Type K thermocouple (one per channel), rubber boot and operator's manual. HH806AW also comes with software, USB cable, wireless receiver and AC adaptor.

Accessories

Model No.	Description
HH800-ADAPTOR	AC adaptor (USB models only)
SC-800	Soft case with belt loop for HH800 series

Software For HH800 Series with USB or Wireless Interface Software for Windows 2000 and Windows XP with Wireless Receiver

HH800-SW

- ✓ Data Logging and Retrieval Software for USB
- ✓ Display Retrieved Data in Graphic Format
- ✓ Display MAX/MIN/AVG/REL
- ✓ High/Low Alarms
- ✓ Selectable Logging Interval
- ✓ Provided on 3.5" CD

HH800W-RSW Windows software and wireless receiver (wireless models only).



The HH800-SW and the HH800W-RSW both allow real time data logging to a PC. For wireless enable meters HH800W-RSW comes with both the software and wireless receiver, while for meters with USB, HH800-SW comes with the software and a USB cable. Both versions of software (compatible with Windows® 10) are identical and can work interchangeably. For meters with built in data storage, the software allows users to download and analyze data on there PC. Users can also export data to Excel or text files for further manipulation.

To Order

Model No.	Description
HH800-SW	Windows software and USB cable (USB models only)
HH800W-RSW	Windows software and wireless receiver (wireless models only) USA version
HH800WE-RSW	Windows software and wireless receiver (wireless models only) European version

Ordering Example: HH800-SW, data logging software for HH800 Series meters with built-in USB port.

Hardware Requirements: Pentium III, 700 Mhz or better, minimum of 150 MB free hard disk space is recommended, single USB port.