

600 A True RMS Clamp Meters and Non-Contact Voltage



HHM-MA640



- ✓ True RMS for Accurate Readings of Non-Sinusoidal Waveforms
- ✓ Built-In Non-Contact Voltage Detector with LED Alert
- ✓ 40 mm (1.5") Jaw Size for Conductors up to 500 MCM
- ✓ 6000 Count, Backlit LCD
- ✓ Includes Multimeter Functions
- ✓ Measures DC Current
- ✓ Relative Mode for Capacitance Zero and Offset Adjustment
- ✓ Data Hold, Min/Max, and Auto Power Off


The HHM-MA640 is a true RMS clamp meter. This meter measures AC current, DC current, AC/DC voltage, resistance, capacitance, frequency, diode test, duty cycle and continuity. The molded case is designed for heavy duty use. The integrated non-contact voltage detector quickly checks for the presence of live wires before testing needs to be started.



Built-in non-contact voltage detector with LED alert.

HHM-MA640 shown smaller than actual size.



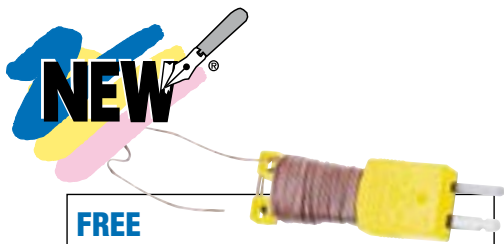

FREE Thermocouple Included!

All models include a free 900 mm (36") Type K insulated beaded wire thermocouple with subminiature connector and wire spool caddy.
Order a Spare! Model No. SC-GG-K-30-36

**40 mm (1.5") jaw size
for conductors up to
500MCM.**



Specifications	Range	Max Resolution	Basic Accuracy (% readings+digits)
Clamp Jaw Opening	40 mm (1.5") approx.	—	—
Display Counts	6000 backlit LCD	—	—
Input Impedance	10M Ω (Vdc and Vac)	—	—
Measurement Rate	2 readings per second, nominal	—	—
AC Current Bandwidth	50/60 Hz	—	—
AC Voltage Bandwidth	50 to 400 Hz	—	—
AC Response	True RMS (AAC and Vac)	—	—
Crest Factor	3.0 in 60A and 600A ranges, (50/60 Hz and 5 to 100% of range)	—	—
AC Current (True RMS)	60.00A, 600.0A	0.01A	$\pm(2.8\% + 8d)$
DC Current (MA640 only)	60.00A, 600.0A	0.01A	$\pm(2.8\% + 8d)$
AC Voltage (True RMS)	6.000V, 60.00V, 600.0V	0.001V	$\pm(1.8\% + 8d)$
DC Voltage	600.0mV, 6.000V, 60.00V, 600.0V	0.1 mV	$\pm(1.5\% + 2d)$
Resistance	600.0 Ω , 6.000 K Ω , 60.00 K Ω , 600.0 K Ω , 6.000M Ω , 60.00M Ω	0.1 Ω	$\pm(1.0\% + 4d)$
Frequency	10Hz to 10kHz	0.01nF	$\pm(3.0\% + 5d)$
Capacitance	40.00nF, 400.0nF, 4.000 μ F, 40.00 μ F, 400.0 μ F, 4000 μ F	0.01nF	$\pm(3.0\% + 5d)$
Temperature	-20 to 760°C (-4 to 1400°F)	0.1°	$\pm(3\% + 9°F/5°C)$
Thermocouple Sensor	Type K thermocouple required		
Duty Cycle	0.5 to 99.0%	0.1%	$\pm(1.2\% + 2d)$
Diode	Test current of 0.9 mA typical; Open circuit voltage 2.8 Vdc typical	—	—
Continuity	Threshold 60 Ω ; Test current < 0.35mA	—	—
Operating Temperature	5 to 40°C (41 to 104°F)	—	—
Storage Temperature	-20 to 60°C (-4 to 140°F)	—	—
Operating Humidity	Max 80% up to 31°C (87°F) decreasing linearly to 50% at 40°C (104°F)		
Storage Humidity	<80%	—	—
Operating Altitude	2000 m (7000') max	—	—
Dimensions	232 L x 77 W x 39 mm D (9.1 x 3 x 1.5")	—	—
Low Battery Indication	Battery symbol is displayed	—	—
Over-Range Indication	'OL' display	—	—
Auto Power OFF	After approx. 15 minutes, with disable	—	—
Weight	271 g (9.6 oz)	—	—
Safety	For indoor use and in accordance with the requirements for double insulation to IEC1010-1 (2001): EN61010-1 (2001) Overvoltage Category III 600V and Category II 1000V, Pollution Degree 2	—	—

To Order

Model No.	Description
HHM-MA640	600A True RMS AC/DC clamp meter with non-contact voltage

Comes complete with test leads, general purpose Type K bead wire temperature probe, 9V battery, carrying case and operator's manual.
Ordering Example: HHM-MA640, 600A true RMS AC/DC clamp meter with non-contact voltage.