

ALUMINUM "S" BEAM LOAD CELLS

HIGH ACCURACY, ECONOMICAL PRICE

STANDARD AND METRIC MODELS

Tension/Compression
Calibrated in Tension
0-25 lb to 0-1000 lb
0-11 kgf to 0-455 kgf

LC105/LCM105 Series

LC115/LCM115 Series



- ✓ Aluminum—for Light Weight and Durability
- ✓ 5-Point Calibration Provided (in Tension)

SPECIFICATIONS

Excitation: 10 Vdc, 15 Vdc maximum

Output: 3 mV/V ± 0.0075 mV/V

Linearity: $\pm 0.03\%$ FSO

Hysteresis: $\pm 0.02\%$ FSO

Repeatability: $\pm 0.01\%$ FSO

Zero Balance: $\pm 1\%$ FSO

Operating Temp Range:

-40 to 93°C (-40 to 200°F)

Compensated Temp Range:

17 to 71°C (60 to 160°F)

Thermal Effects:

Zero: 0.002% FSO/°C

Span: 0.002% rdg/°C

Safe Overload: 150% of capacity

Ultimate Overload: 300% of capacity

Bridge Resistance: $350 \pm 5 \Omega$

Full Scale Deflection: 0.25 to 0.50 mm

(0.010 to 0.020")

Construction: Aluminum

Electrical (4-Conductor Shielded Cable):

≤ 100 kgf/200 lb: 9 m (30') 24 AWG

> 100 kgf/200 lb: 9 m (30') 20 AWG

LC115 Mating Connector:

PT06F10-6S (sold separately)

LC115 Cable Assembly with Twist-

Lock Connector: CA-4PC24-2-015

(sold separately)


Protection Class: IP65

Low ranges
 standard/metric LC105-25
 shown actual size.


High ranges
 standard/metric LC105-500
 shown actual size.

REC-012M,
 rod end
 sold separately.

LOW RANGES

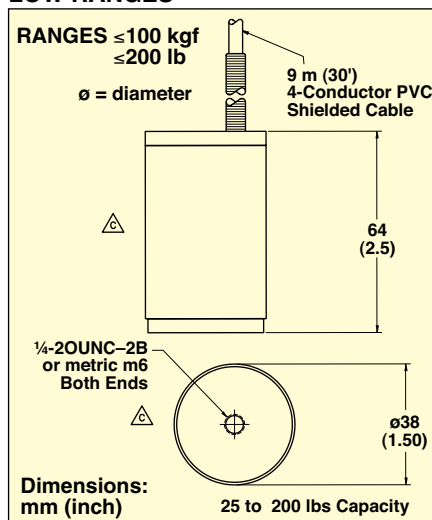

HIGH RANGES

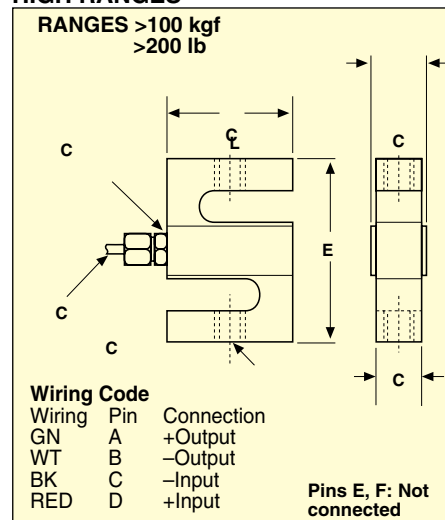


Dimensions: mm (inch)

CAPACITY	A	B	C	D	E	WEIGHT kg (lb)
250 to 1000 (lb)	1/4-20 UNF	32 (1.25)	25 (1.0)	51 (2.0)	76 (3.0)	0.5 (1.1)
250 to 500 (kgf)	M12 x 1.75-6H	32 (1.25)	25 (1.0)	51 (2.0)	76 (3.0)	0.5 (1.1)




LC105-25 shown smaller than actual size.

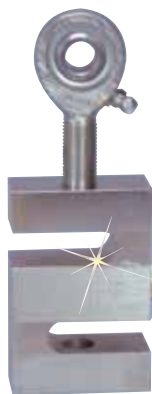

LCM105-250 shown smaller than actual size.

ALUMINUM "S" BEAM LOAD CELLS HIGH ACCURACY, ECONOMICAL PRICE STANDARD AND METRIC MODELS



To Order

CAPACITY		CABLE† MODEL NO.	COMPATIBLE METERS*	LOAD BUTTON	ROD END
lb	kgf			MODEL NO.	MODEL NO.
STANDARD MODELS					
25	11	LC105-25	DPIS, DP41-S, DP25B-S	—	—
50	23	LC105-50	DPIS, DP41-S, DP25B-S	—	—
100	45	LC105-100	DPIS, DP41-S, DP25B-S	—	—
200	91	LC105-200	DPIS, DP41-S, DP25B-S	—	—
250	114	LC105-250†	DPIS, DP41-S, DP25B-S	LBC-012	REC-012M
500	227	LC105-500†	DPIS, DP41-S, DP25B-S	LBC-012	REC-012M
1000	455	LC105-1K†	DPIS, DP41-S, DP25B-S	LBC-012	REC-012M
METRIC MODELS					
22	10	LCM105-10	DP41-B, DP41-S, DP25B-S	MLBC-M6	MREC-M6M
55	25	LCM105-25	DP41-B, DP41-S, DP25B-S	MLBC-M6	MREC-M6M
110	50	LCM105-50	DP41-B, DP41-S, DP25B-S	MLBC-M6	MREC-M6M
220	100	LCM105-100	DP41-B, DP41-S, DP25B-S	MLBC-M6	MREC-M6M
551	250	LCM105-250†	DP41-B, DP41-S, DP25B-S	MLBC-M12	MREC-M12M
1102	500	LCM105-500†	DP41-B, DP41-S, DP25B-S	MLBC-M12	MREC-M12M

Comes complete with 5-point NIST-traceable calibration and 59 kΩ shunt data.

* Visit us online for compatible meters.

† Connector style available: change model number from **LC105** to **LC115**, or from **LCM105** to **LCM115**, no additional charge.

Ordering Examples: **LC105-100**, ±100 lb capacity load cell.

LCM105-250, 250 kgf capacity load cell. **REC-012M**, matching rod end. **PT06F10-6S**, mating connector (sold separately).

ACCESSORY

MODEL NO.	DESCRIPTION
PT06F10-6S	Mating connector for LC115/LCM115 series load cells
CA-4PC24-2-015	Cable assembly with twist lock connector for LC115/LCM115 series load cells

1/8 DIN STRAIN METERS WITH OPTIONAL RELAYS AND ANALOG OUTPUT

MONOGRAM® SERIES

DP25B Series



- ✓ Relay Output with Adjustable Deadband
- ✓ Isolated or Non-Isolated Analog Output
- ✓ Totally Programmable Color Display
- ✓ Low-Voltage Power Options

The TRODEX® DP25B Series meters have the biggest, brightest display of any 1/8 DIN panel meter. The user can select the display color: **RED**, **AMBER**, or **GREEN**.

Along with the 4-digit, 9-segment display, these low-cost panel meters/controllers provide unparalleled accuracy in signal conditioning. Additional features include microprocessor-based operation; dual 5 A SPDT relays (optional); and isolated or non-isolated

PATENTED

DP25B shown smaller than actual size.

analog output in ranges of 0 to 10 Vdc, 0 to 20 mA, or 4 to 20 mA, which can be used for retransmission of the display value or as a proportional control output.

Because they accept a wide range of DC voltage and current inputs, the DP25B-E strain meters can handle most process and strain applications. Features include easy front-panel scaling to virtually any engineering units, a remote tare function for weighing applications, and a hardware lockout to prevent unauthorized changes in setup. In addition, the DP25B-E meters feature built-in excitation in 4 user-selectable voltages, which makes them compatible with most transducers and transmitters.

Visit us online
for More
Information