

## SCREW PLUG IMMERSION HEATERS CLEAN WATER APPLICATIONS


MT Series  
Starts at  
**\$127**




- ✓ 1 NPT Brass Screw Plug
- ✓ Copper Sheath Element
- ✓ High Watt Density (64 to 86 W/in<sup>2</sup>)
- ✓ 0.75 to 3 kW
- ✓ Without Thermostat
- ✓ 120 and 240V, 1 Phase
- ✓ General Purpose or Moisture-Resistant/Explosion-Resistant Terminal Enclosure

### SPECIFICATIONS

**Wattage:** 0.75 to 3 kW  
**Power:** 120 or 240V, 1 phase  
**Watt Density:** 64 to 86 W/in<sup>2</sup>  
**Screw Plug:** 1 NPT brass screw plug  
**Enclosures:** E1 general purpose, NEMA 1 rated, or type E2 moisture-resistant/explosion-resistant enclosure.<sup>2</sup>

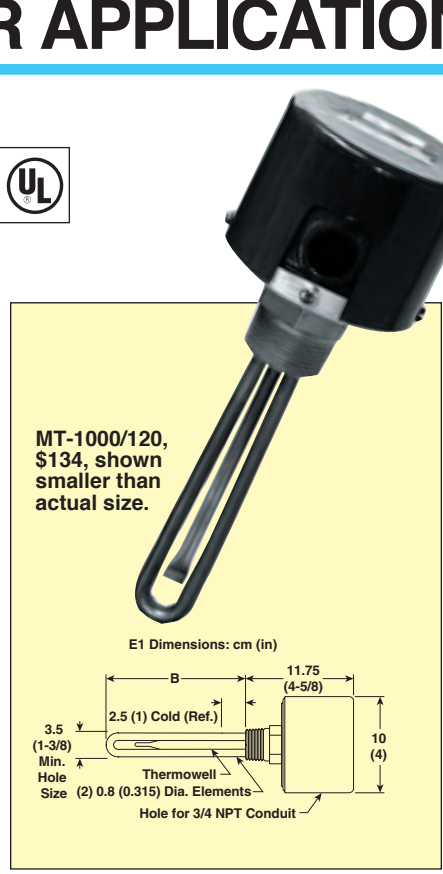

**Note:** This immersion heater should be used with an approved temperature control device to assure safe operation.

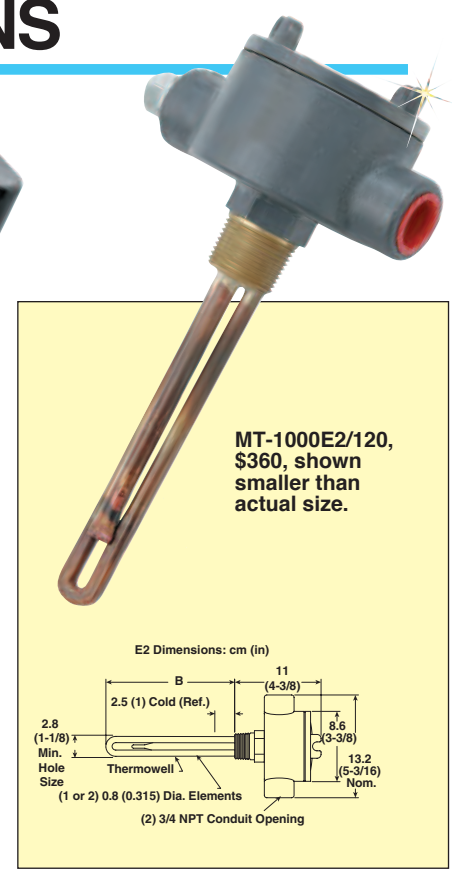

**MOST POPULAR MODELS HIGHLIGHTED!**

To Order (Specify Model Number)										
kW	Volts	W/in <sup>2</sup>	No. Htg. Elem.	E1 General Purpose Enclosure <sup>1</sup>				E2 Moisture Resis/Explosion Resis. <sup>2</sup>		
				Dim. B cm (in)	Model No.	Price	Wt. kg (lb)	Model No.	Price	Wt. kg (lb)
0.75	120	64	1	16 (6 <sup>5</sup> / <sub>16</sub> )	MT-750/*	\$127	0.9 (2)	MT-750E2/*	\$355	2.3 (5)
0.75	240	64	1	16 (6 <sup>5</sup> / <sub>16</sub> )	MT-750/*	127	0.9 (2)	MT-750E2/*	355	2.3 (5)
1	120	85	1	16 (6 <sup>5</sup> / <sub>16</sub> )	MT-1000/*	134	0.9 (2)	MT-1000E2/*	360	2.3 (5)
1	240	85	1	16 (6 <sup>5</sup> / <sub>16</sub> )	MT-1000/*	134	0.9 (2)	MT-1000E2/*	360	2.3 (5)
1.25	120	83	1	20 (8 <sup>1</sup> / <sub>16</sub> )	MT-1250/*	145	0.9 (2)	MT-1250E2/*	370	2.3 (5)
1.25	240	83	1	20 (8 <sup>1</sup> / <sub>16</sub> )	MT-1250/*	145	0.9 (2)	MT-1250E2/*	370	2.3 (5)
1.5	120	86	1	23.5 (9 <sup>1</sup> / <sub>4</sub> )	MT-1500/*	153	0.9 (2)	MT-1500E2/*	375	2.3 (5)
1.5	240	86	1	23.5 (9 <sup>1</sup> / <sub>4</sub> )	MT-1500/*	153	0.9 (2)	MT-1500E2/*	375	2.3 (5)
2	120	83	1	31 (12 <sup>1</sup> / <sub>4</sub> )	MT-2000/*	171	0.9 (2)	MT-2000E2/*	395	2.3 (5)
2	240	83	1	31 (12 <sup>1</sup> / <sub>4</sub> )	MT-2000/*	171	0.9 (2)	MT-2000E2/*	395	2.3 (5)
2.5	120	79	1	41 (16 <sup>1</sup> / <sub>4</sub> )	MT-2500/*	190	0.9 (2)	MT-2500E2/*	415	2.3 (5)
2.5	240	79	1	41 (16 <sup>1</sup> / <sub>4</sub> )	MT-2500/*	190	0.9 (2)	MT-2500E2/*	415	2.3 (5)
3	120	78	1	50 (19 <sup>3</sup> / <sub>8</sub> )	MT-3000/*	210	1.4 (3)	MT-3000E2/*	435	2.7 (6)
3	240	78	1	50 (19 <sup>3</sup> / <sub>8</sub> )	MT-3000/*	210	1.4 (3)	MT-3000E2/*	435	2.7 (6)

\* Designate voltage, i.e., "120" for 120 Vac or "240" for 240 Vac.  
<sup>1</sup> Heaters with general purpose enclosures are UL Listed and CSA certified.  
<sup>2</sup> Heaters with moisture-resistant/explosion-resistant enclosures are CSA NRTL/C certified and are not intended for use in hazardous areas.  
**Ordering Example:** MT-750/240, 0.75 kW heater powered by 240 Vac, \$127.