

AIR PRESSURE REGULATOR FOR HIGH FLOW APPLICATIONS

Up to 80 scfm

PRG700 Series







PRG700-2, shown
actual size.

- ✓ High Flow Capacity—
Up to 80 scfm
- ✓ Output Pressure
Insensitive to Flow
Changes
- ✓ Can be Serviced Without
Removing From Air Line
- ✓ Insensitive to Changes
in Flow

The TRODEKS PRG700 Series regulators are designed for applications that require high flow capacity and accurate process control. A poppet valve balanced by a rolling diaphragm insures a constant output pressure even during wide supply pressure variations. Stability of regulated pressure is maintained under varying flow conditions through the use of an aspirator tube, which adjusts the air supply in accordance with the flow velocity.



Performance Curves

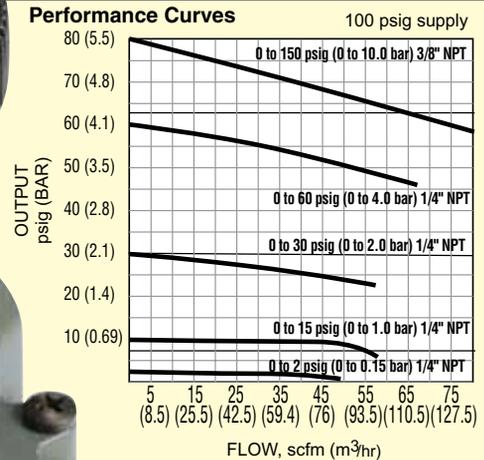

Dimensions:
mm (inch)
ø = diameter

SPECIFICATIONS

Flow Capacity: See performance curves

Exhaust Capacity: 4 scfm [outlet pressure 5 psi > set pressure]

Sensitivity: 1/8" (3.2 mm) H₂O

Supply Pressure Effect: < 0.1 psi for 100 psi change

Air Consumption (Steady State):

From 1.0 to 12.5 scfh

Supply Pressure: 250 psig (17.5 bar) maximum

Operating Temperature: -40 to 71°C (-40 to 160°F)

Weight: 0.74 kg (1.625 lb)

Mounting: Pipe, panel, or optional bracket

Port Sizes: 1/4 NPT female

To Order

MODEL NO.	OUTPUT PRESSURE RANGE	
	psi	bar
PRG700-2	0 to 2	0 to 0.15
PRG700-15	0 to 15	0 to 1.0
PRG700-30	0 to 30	0 to 2.0
PRG700-60	0 to 60	0 to 4.0
PRG700-150	0 to 150	0 to 10

ACCESSORY

MODEL NO.	DESCRIPTION
PRG200-MB	Mounting bracket

Comes complete with operator's manual.

Ordering Example: PRG700-30, high flow regulator with 0 to 30 psi range and 1/4 NPT fittings.