

# Compact Rugged Pressure Transmitters

TRODEKS®

**15 to 5000 psi, 1 to 345 bar**  
**4 to 20 mA Output**

**PX119 Series**



- ✓ Low Cost
- ✓ Compact Size
- ✓ 0.50% BFSL Accuracy
- ✓ All Stainless Steel Body

The PX119 pressure transmitter series is ideally suited for material handling, industrial and mobile equipment applications where space constraints require a small body size. The body is machined from a single piece of stainless steel to provide added protection for the internal electronics. A piezoresistive ceramic sensor along with ASIC signal conditioning provide an excellent thermally compensated output.

## Specifications

**Accuracy:** 0.50% BFSL Accuracy

**Pressure Range:** 15 to 5000 psi (345 bar)

**Output/Supply Voltage:** 4 to 20 mA:  
8 to 30 Vdc

**Output Connections:** DIN 43650C  
(mini DIN)

**Output Wiring:** Pin 1: Supply +,  
Pin 2: Supply -

**Long Term Drift:** <0.3% FS  
@ 25°C (77°F)

**Thermal Error:**

**7.5 psi ≥ 100 psi:** 0.01% FS/°F  
(0.018% FS/°C)

**100 psi > 400 psi:** 0.009% FS/°F  
(0.016% FS/°C)

**400 psi ≥ 1000 psi:** 0.011% FS/°F  
(0.019% FS/°C)

**1000 psi > 3000 psi:** 0.012% FS/°F  
(0.021% FS/°C)

**3000 psi ≥ 5000 psi:** 0.018% FS/°F  
(0.028% FS/°C)

**Compensated Temperature:**  
0 to 85°C (32 to 185°F)

**Operating Temperatures:**  
-40 to 135°C (-40 to 257°F)

**Process Connection:** ¼ NPT male

**Construction:** 304 SS

**Wetted Materials:** 304 SS and  
Ceramic Al<sub>2</sub>O<sub>3</sub>, NBR Standard


**Vibration:** 10 g (20 to 2000 Hz) for  
<58 psi (4 bar); 20 g (20 to 500 Hz) for  
ranges >58 psi (4 bar)

**Protection:** Overvoltage, short  
circuit, reverse polarity

**Response Time:** 1 ms

**Ingress Protection:** IP65

**Weight:** 70 g (0.15 lb)

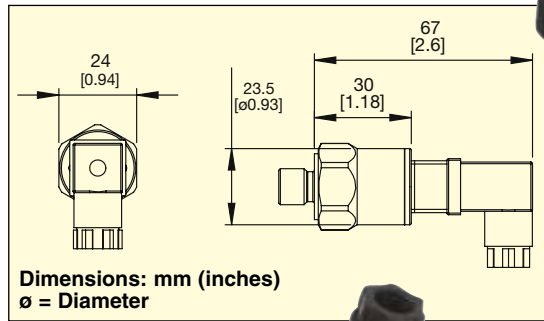

PX119, both  
models shown  
smaller than  
actual size.



## To Order

Ranges		% Proof (FS)	% Burst (FS)	mini DIN Connection
psi	bar			
Absolute Pressure				
0 to 15	0 to 1	193.4%	386.7%	PX119-015AI
0 to 30	0 to 2.1	193.4%	241.7%	PX119-030AI
0 to 100	0 to 6.9	290.1%	362.6%	PX119-100AI
0 to 150	0 to 10.3	193.4%	241.7%	PX119-150AI
0 to 300	0 to 21	193.4%	241.7%	PX119-300AI
0 to 600	0 to 42	241.7%	290.1%	PX119-600AI
0 to 1000	0 to 69	290.1%	362.6%	PX119-1KAI
0 to 1500	0 to 103	193.4%	241.7%	PX119-1.5KAI
0 to 3000	0 to 207	193.4%	241.7%	PX119-3KAI
0 to 5000	0 to 345	188.5%	188.5%	PX119-5KAI
Gage Pressure				
0 to 15	0 to 1	193.4%	386.7%	PX119-015GI
0 to 30	0 to 2.1	193.4%	241.7%	PX119-030GI
0 to 100	0 to 6.9	290.1%	507.6%	PX119-100GI
0 to 150	0 to 10.3	193.4%	338.4%	PX119-150GI
0 to 300	0 to 21	193.4%	338.4%	PX119-300GI
0 to 600	0 to 42	241.7%	362.6%	PX119-600GI
0 to 1000	0 to 69	290.1%	362.6%	PX119-1KGI
0 to 1500	0 to 103	193.4%	241.7%	PX119-1.5KGI
0 to 3000	0 to 207	193.4%	217.5%	PX119-3KGI
0 to 5000	0 to 345	188.5%	188.5%	PX119-5KGI

**Ordering Examples:** PX119-3KGI, 3000 psi gage pressure transmitter with 4 to 20 mA output and mini DIN termination.

PX119-015AI, 15 psi absolute pressure transmitter with 4 to 20 mA output and mini DIN termination.

## Accessories

Model No.	Description
CA-319-4PC24-XXX-WP	Vented cable used for PX119 ≤1000 psig, terminated in a clean dry area that is open to atmosphere for correct operation*
CA-319-4PC24-XXX	Standard cable for PX119 >1000 psig and all absolute ranges, terminated in a dry location or sealed to prevent water from getting into the cable/sensor*
DP8PT	PLATINUM™ Series ¼ DIN 4-digit single display panel meter