



# RESISTANCE WIRE FOR TEMPERATURE COMPENSATION AND ZERO BALANCE


**MOST POPULAR MODEL HIGHLIGHTED!**

## To Order (Specify Model Number)


MODEL NO.	PRICE	FUNCTION	MATERIAL	Ω/FT	TEMP COEFF.	SPOOL LENGTH
<b>SGB-36</b>	<b>\$70</b>	Zero and span temp comp.	Balco	19.7	0.45%/°C	500'
SGC-36	20	Zero and span temp comp.	Copper	0.415	0.39%/°C	500'
SGM-36	26	Zero balance	Manganin	15.2	0.002%/°C	200'

## BONDABLE TERMINAL PADS


Terminal pads serve 2 main purposes. First, they act as intermediate points for attaching ribbon leads of thin-gage wire to heavier instrumentation wires. Second, they give stress relief to strain gage systems. When the heavy instrumentation wire moves, the terminal pad protects the strain gage. Carrier is polyimide with a thickness of 0.075 mm (0.003"). Minimum bending radius is 2 mm (0.079"). Maximum temperature is 220°C (428°F).

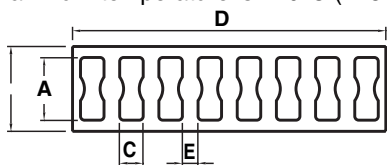

**BTP-5, \$40,**  
shown actual size.

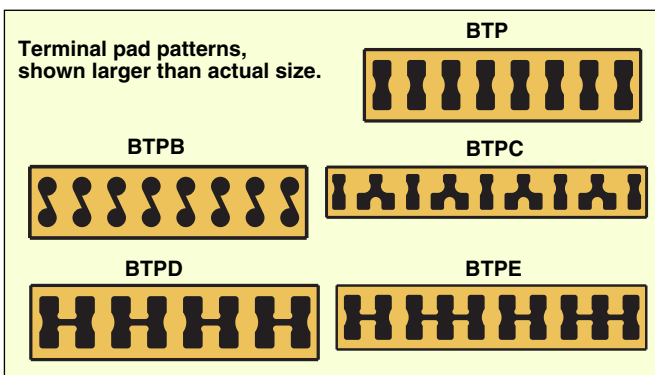

## TYPICAL STRAIN GAGE INSTALLATION

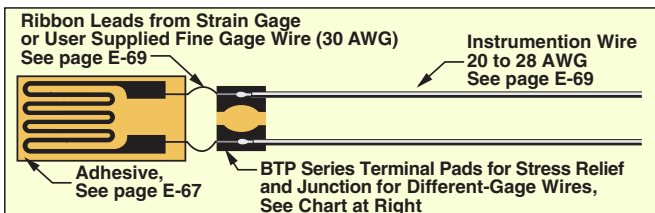

## BRIDGE COMPLETION RESISTORS

Accuracy: 0.1%

Temperature Compensation: 5 ppm; -20 to 80°C (-4 to 176°F)

Power: ¼ W

**MOST POPULAR MODELS HIGHLIGHTED!**

## To Order (Specify Model Number)

MODEL NO.	PRICE	Ω	MAX BRIDGE EXC.
<b>RES-120</b>	<b>\$7.50</b>	120	10 Vdc
RES-250	7.50	250	15 Vdc
RES-350	7.50	350	18 Vdc

Note: For strain gage accessories see pages E-56 to E-59.

Ordering Example: RES-350, 350 Ω bridge completion resistor, \$7.50.

## BONDABLE TERMINAL PADS

### To Order (Specify Model Number)

MODEL NO.	PRICE	STRIPS PER PACK	DIMENSIONS mm (in)				
			A	B	C	D	E
<b>BTP-1</b>	<b>\$18.50</b>	70	1.8 (0.07)	2.6 (0.1)	0.7 (0.03)	9.9 (0.39)	0.6 (0.02)
BTP-2	20.50	60	2.4 (0.09)	3.4 (0.13)	0.9 (0.04)	13.2 (0.52)	0.8 (0.03)
BTP-3	29.00	50	3.2 (0.13)	4.5 (0.18)	1.2 (0.05)	17.6 (0.69)	1 (0.04)
BTP-4	32.00	30	4.8 (0.19)	6.5 (0.26)	1.8 (0.07)	24 (0.94)	1.2 (0.05)
BTP-5	40.00	20	6 (0.24)	8.5 (0.33)	2.3 (0.09)	32.4 (1.28)	1.8 (0.07)
BTP-6	40.00	10	9 (0.35)	11.8 (0.46)	3.4 (0.13)	41.4 (1.63)	1.8 (0.07)
BTPB-1	18.50	70	1.8 (0.07)	2.6 (0.1)	0.7 (0.03)	9.9 (0.39)	0.6 (0.02)
BTPB-2	20.50	60	2.4 (0.09)	3.4 (0.13)	0.9 (0.04)	13.2 (0.52)	0.8 (0.03)
BTPB-3	29.00	50	3.2 (0.13)	4.5 (0.18)	1.2 (0.05)	17.6 (0.69)	1 (0.04)
BTPB-4	32.00	30	4.8 (0.19)	6.5 (0.26)	1.8 (0.07)	24 (0.94)	1.2 (0.05)
BTPB-5	40.00	20	6 (0.24)	8.5 (0.33)	2.3 (0.09)	32.4 (1.28)	1.8 (0.07)
BTPB-6	40.00	10	9 (0.35)	11.8 (0.46)	3.4 (0.13)	41.4 (1.63)	1.8 (0.07)
BTPC-1	36.00	30	3.2 (0.13)	4.5 (0.18)	1.2 (0.05)	28.6 (1.13)	1 (0.04)
BTPC-2	36.00	25	3.8 (0.15)	5.4 (0.21)	1.4 (0.06)	34.3 (1.35)	1.2 (0.05)
BTPC-3	36.00	20	4.8 (0.19)	6.5 (0.26)	1.8 (0.07)	39 (1.54)	1.2 (0.05)
BTPC-4	42.00	15	6 (0.24)	8.5 (0.33)	2.3 (0.09)	52.7 (2.07)	1.8 (0.07)
BTPD-1	18.50	25	2.4 (0.09)	3.4 (0.13)	0.9 (0.04)	13.2 (0.52)	0.8 (0.03)
BTPD-2	23.50	25	3.2 (0.13)	4.5 (0.18)	1.2 (0.05)	17.6 (0.69)	1 (0.04)
BTPD-3	26.00	20	4.8 (0.19)	6.5 (0.26)	1.8 (0.07)	24 (0.94)	1.2 (0.05)
BTPE-1	28.50	25	2.4 (0.09)	3.4 (0.13)	0.9 (0.04)	16.5 (0.65)	0.8 (0.03)
BTPE-2	34.00	25	3.2 (0.13)	4.5 (0.18)	1.2 (0.05)	22 (0.87)	1 (0.04)
BTPE-3	35.50	20	4.8 (0.19)	6.5 (0.26)	1.8 (0.07)	30 (1.18)	1.2 (0.05)