

FLANGED IMMERSION HEATERS FOR MILD CORROSIVE SOLUTIONS



TMS Series

- ✓ 240 and 480 V, 1 & 3 Phase
- ✓ 3 to 36 kW
- ✓ Premium Grade Stainless Steel (8% Nickel) Sheathed Heating Elements for Use in Mild Corrosive Solutions
- ✓ Time Tested
- ✓ Heavy Duty

FEATURES

Rugged construction. Sturdy stainless steel .475" (1.2 cm) diameter elements, welded to steel flanges provide superior rigidity and strength. Heavy duty jumper straps and terminal parts assure permanent tightness of connections and an extra margin of current carrying capacity.

Long life elements. High grade 304 series stainless steel outer sheath provides the benefits of strength and durability in those applications where stainless performance is required.


SPECIFICATIONS

Wattage: 3 to 36 kW
Power: 240 and 480 V, 1 & 3 phase
Watt Density: 23 W/in²

Please Note: Approved pressure and/or temperature limiting controls must be used to assure safe operation in the event of system malfunctions. See Temperature Section.¹ Heaters with General Purpose & Moisture Resistant Enclosures are UL Listed and CSA Certified and Not Intended for use in Hazardous Areas.

Ordering Example: Model
 TMS-3035M/240/3P Is a 3 kW heater powered by 3 phase 240 VAC, \$837.

Ordering Example: Model
 TMS-6095M/480/3P Is a 9 kW heater powered by 3 phase 480 VAC, \$1526.

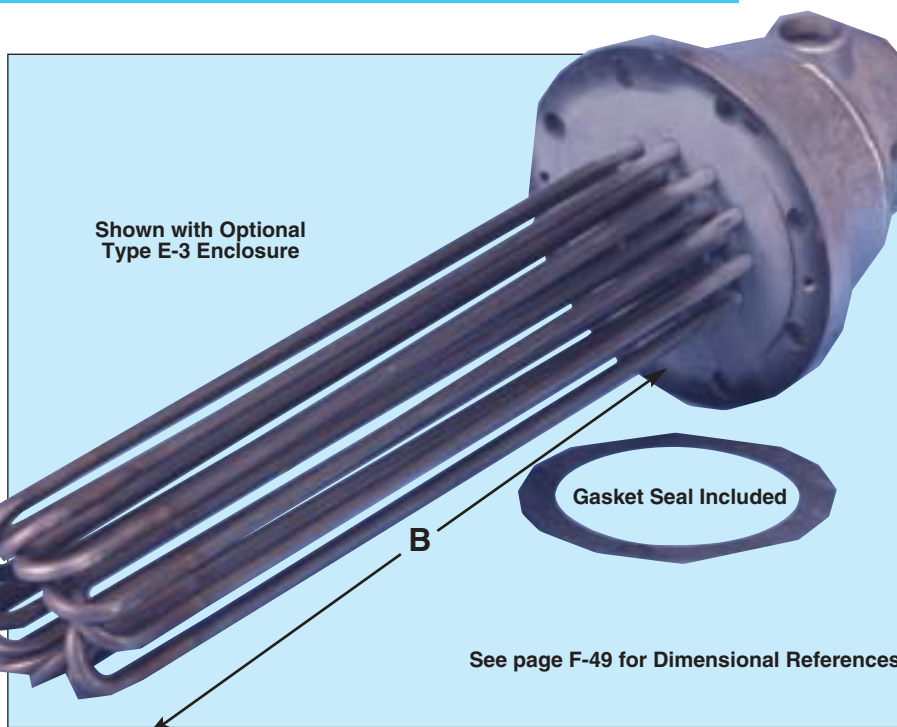

To Order (Specify Model Number)

kW	Circ.	Dim. in. (cm) B	E-1 General Purpose Encl. ¹		Wt. lb (kg)	Dim. in. (cm) N
			Model No.	Price		
3 Inch-150 lb. Steel Flange, 3 Stainless Steel Elements — 23 W/in²						
3	1	18 ¹ / ₆ (46)	TMS-3035M/240/*	\$837	16 (7)	1 (3)
3	1	18 ¹ / ₆ (46)	TMS-3035M/480/*	837	16 (7)	1 (3)
4.5	1	25 ³ / ₆ (64)	TMS-3045M/240/*	961	17 (8)	1 (3)
4.5	1	25 ³ / ₆ (64)	TMS-3045M/480/*	961	17 (8)	1 (3)
6	1	33 ¹ / ₆ (84)	TMS-3065M/240/*	1125	18 (8)	1 (3)
6	1	33 ¹ / ₆ (84)	TMS-3065M/480/*	1125	18 (8)	1 (3)
7.5	1	40 ⁰ / ₆ (103)	TMS-3075M/240/3P	1266	19 (9)	1 (3)
7.5	1	40 ⁰ / ₆ (103)	TMS-3075M/480/3P	1266	19 (9)	1 (3)
9	1	48 ¹ / ₆ (122)	TMS-3095M/480/*	1435	21 (10)	1 (3)
9	1	48 ¹ / ₆ (122)	TMS-3095M/240/3P	1435	21 (10)	1 (3)
5 Inch-150 lb. Steel Flange, 6 Stainless Steel Elements — 23 W/in²						
9	1	25 ³ / ₆ (64)	TMS-6095M/**/3P	1526	32 (15)	1 (3)
12	1	33 ¹ / ₆ (84)	TMS-6125M/**/3P	1690	33 (15)	1 (3)
15	1	40 ⁰ / ₆ (103)	TMS-6155M/**/3P	1949	35 (16)	1 (3)
20	2	52 ¹ / ₆ (46)	TMS-6205M/240/3P	2388	38 (17)	1 (3)
20	1	52 ¹ / ₆ (46)	TMS-6205M/480/3P	2388	38 (17)	1 (3)
25	2	65 ¹ / ₆ (64)	TMS-6255M/240/3P	2779	42 (19)	1 (3)
25	1	65 ¹ / ₆ (84)	TMS-6255M/480/3P	2779	42 (19)	1 (3)
30	2	78 ¹ / ₆ (84)	TMS-6305M/**/3P	3277	46 (21)	1 (3)
6 Inch-150 lb. Steel Flange, 12 Stainless Steel Elements — 23 W/in²						
18	2	25 ³ / ₆ (64)	TMS-1218M/**/3P	3174	67 (30)	1 (3)
24	2	33 (84)	TMS-1224M/**/3P	3372	76 (34)	1 (3)
30	2	40 ¹ / ₂ (103)	TMS-1230M/**/3P	3510	84 (38)	1 (3)
36	2	48 (122)	TMS-1236M/**/3P	3814	111 (50)	1 (3)