


FLANGED IMMERSION HEATERS FOR CLEAN WATER



TM Series

- ✓ Flange Sizes 3" to 5" of High Grade Steel
- ✓ General Purpose, NEMA 1 Rated Enclosure or Moisture Resistant, Explosion Resistant† Enclosure Available
- ✓ Sturdy 0.475" Diameter Copper Elements
- ✓ 6 to 150 kW
- ✓ 240 and 480 Vac Power, 1 and 3 Phase

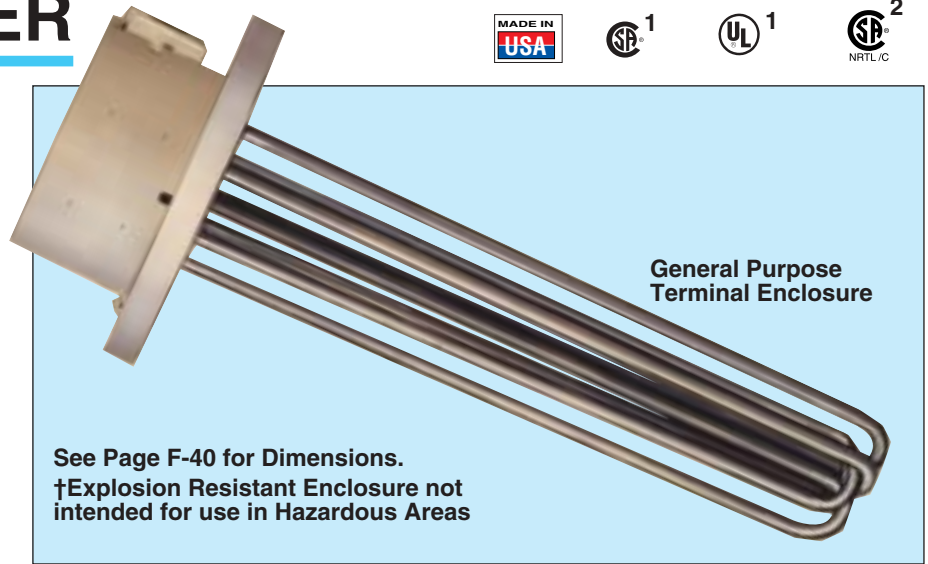

General Purpose Terminal Enclosure

See Page F-40 for Dimensions.

†Explosion Resistant Enclosure not intended for use in Hazardous Areas

Please note: Approved pressure and/or temperature limited controls must be used to assure safe operation in the event of system malfunctions. See Temperature Section.

APPLICATIONS

For clean water pH 6 to 8 –
Clean municipal water such as used in washing, rinsing and industrial processes with a pH factor range of pH 6 to pH 8.

For non-corrosive solutions –
Non-corrosive water solutions or weak alkaline or acid content of up to 1% by volume, such as sodium carbonate, sodium chlorate or other neutral salts.

To Order (Specify Model Number)

MOST POPULAR ITEMS HIGHLIGHTED

kW	Circ.	Dim. in (cm)	Wt. lbs (kg)	E1 Gen. Purpose Encl. ¹		Dim. in (cm)	E-2 Moisture Resistant/Explosion Res. Encl. ²		Dim. in (cm)	
				Model No.	Price		Model No.	Price		
3 Inch-150 lb. Steel Flange, 3 Copper Sheath Elements — 45 W/in²										
6	1	18 ¹ / ₁₆ (46)	16(7)	TM-3065/240/*	\$762	1 (3)	TM-3065E2/240/*	\$965	¾ (2)	
6	1	18 ¹ / ₁₆ (46)	16(7)	TM-3065/480/*	762	1 (3)	TM-3065E2/480/*	965	¾ (2)	
9	1	25 ³ / ₁₆ (64)	17(8)	TM-3095/240/*	856	1 (3)	TM-3095E2/240/*	1051	¾ (2)	
9	1	25 ³ / ₁₆ (64)	17(8)	TM-3095/480/*	856	1 (3)	TM-3095E2/480/*	1051	¾ (2)	
12	1	33 ¹ / ₁₆ (84)	18 (8)	TM-3125/240	839	1½ (3)	TM-3125E2/240	1156	1 (3)	
12	1	33 ¹ / ₁₆ (84)	18 (8)	TM-3125/240/3P	953	1 (3)	TM-3125E2/240/3P	1156	¾ (2)	
12	1	33 ¹ / ₁₆ (84)	18 (8)	TM-3125/480/*	953	1 (3)	TM-3125E2/480/*	1156	¾ (2)	
15	1	40 ³ / ₁₆ (103)	20 (9)	TM-3155/240	1051	1 (3)	TM-3155E2/240	1266	1¼ (3)	
15	1	40 ³ / ₁₆ (103)	20 (9)	TM-3155/240/3P	1051	1½ (3)	TM-3155E2/240/3P	1266	¾ (2)	
15	1	40 ³ / ₁₆ (103)	20 (9)	TM-3155/480/*	1051	1 (3)	TM-3155E2/480/*	1266	¾ (2)	
18	1	48 ¹ / ₁₆ (122)	21(10)	TM-3185/240	1141	1½ (3)	TM-3185E2/240	1344	1¼ (3)	
18	1	48 ¹ / ₁₆ (122)	21(10)	TM-3185/240/*	1141	1 (3)	TM-3185E2/240/3P	1344	¾ (2)	
18	1	48 ¹ / ₁₆ (122)	21(10)	TM-3185/480/*	1141	1 (3)	TM-3185E2/480/*	1344	¾ (2)	

To Order (Specify Model Number)

kW	Circ. & Ph.	Dim. in (cm)	Weight lb (kg)	E-1 Gen. Purpose Encl. ¹		Dim. in (cm)	E-3 Explosion Res. Encl. ²		Dim. in (cm)	E-4 Moisture Res. Encl. ¹		Dim. in (cm)
				Model No.	Price		Model No.	Price		Model No.	Price	
5 Inch-150 Lb. Steel Flange, 6 Copper Sheath Elements — 45 W/in²												
12	1-3	18 ¹ / ₁₆ (46)	30 (14)	TM-6125/**/3P	\$1138	1 (3)	TM-6125E3/**/3P	\$1680	1½ (4)	TM-6125E4/**/3P	\$1589	1 (3)
15	1-3	19 ³ / ₁₆ (50)	31 (14)	TM-6155/**/3P	1173	1 (3)	TM-6155E3/**/3P	1709	1½ (4)	TM-6155E4/**/3P	1627	1 (3)
18	1-3	25 ³ / ₁₆ (64)	33 (15)	TM-6185/**/3P	1309	1 (3)	TM-6185E3/**/3P	1850	1½ (4)	TM-6185E4/**/3P	1766	1 (3)
24	2-3	33 ¹ / ₁₆ (84)	37 (17)	TM-6245/240/3P	1583	1 (3)	TM-6245E3/240/3P	2124	1½ (4)	TM-6245E4/240/3P	2044	1 (3)
24	1-3	33 ¹ / ₁₆ (84)	37 (17)	TM-6245/480/3P	1583	1 (3)	TM-6245E3/480/3P	2124	1½ (4)	TM-6245E4/480/3P	2044	1 (3)
30	2-3	40 ³ / ₁₆ (103)	40 (18)	TM-6305/**/3P	1848	1 (3)	TM-6305E3/**/3P	2389	1½ (4)	TM-6305E4/**/3P	2304	1 (3)
40	2-3	52 ¹ / ₁₆ (132)	51 (23)	TM-6405/**/3P	2304	1 (3)	TM-6405E3/**/3P	2849	1½ (4)	TM-6405E4/**/3P	2759	1 (3)
60	2-3	78 ¹ / ₁₆ (198)	77 (35)	TM-6605/480/3P	3283	1 (3)	TM-6605E3/480/3P	3833	1½ (4)	TM-6605E4/680/3P	3745	1 (3)